


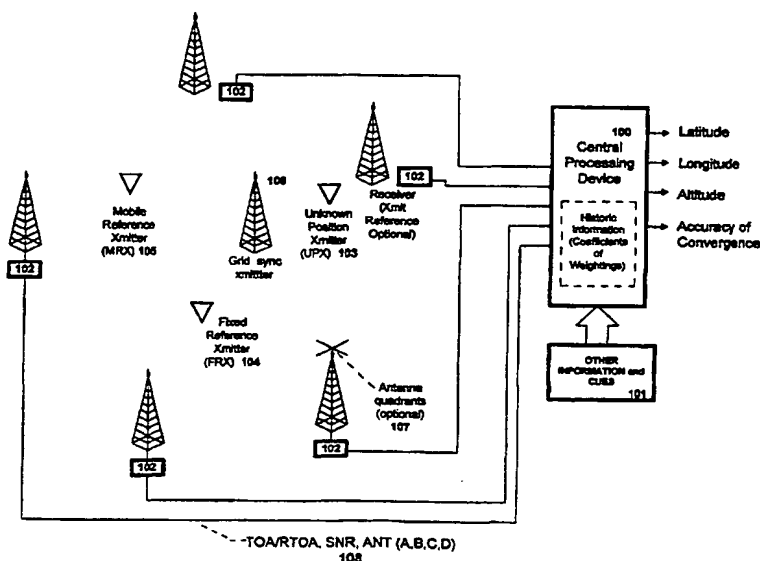

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b>  <b>G01S</b>	<b>A2</b>	<b>(11) International Publication Number:</b> <b>WO 96/42020</b>  <b>(43) International Publication Date:</b> 27 December 1996 (27.12.96)
<b>(21) International Application Number:</b> PCT/US96/09012 <b>(22) International Filing Date:</b> 6 June 1996 (06.06.96)  <b>(30) Priority Data:</b> 08/487,522      7 June 1995 (07.06.95)      US  <b>(71) Applicant (for all designated States except US):</b> SANCONIX, INC. (DEL CORP.) [US/US]; Suite 202, 101 W. Robert E. Lee Boulevard, New Orleans, LA 70124 (US).  <b>(72) Inventors; and</b> <b>(75) Inventors/Applicants (for US only):</b> SANDERFORD, Hugh, Britton, Jr. [US/US]; 7331 General Haig, New Orleans, LA 70124 (US). POPPE, Martin, C. [US/US]; 233 Van Patten Parkway, Burlington, VT 05401-1135 (US).  <b>(74) Agent:</b> REGARD, Joseph, T.; Joseph T. Regard, Ltd. (plc), Suite 100, 3200 Ridgelake Avenue, Metairie, LA 70002 (US).		<b>(81) Designated States:</b> AU, CA, US, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>Without international search report and to be republished upon receipt of that report.</i>

**(54) Title:** ENHANCED POSITION CALCULATION**(57) Abstract**

A system for enhancing the accuracy of a radio position fix, utilizing computational techniques including neural networks, mapped grid coefficients as input to a set of simultaneous or differential equations, and table lookup of correction coefficients for known low accuracy positions. Receiver array synchronization, such that all system elements in a particular coverage area will obtain a time reference appropriate for time of flight radio location measurements, is disclosed. Techniques to enhance the accuracy of position fix references, which are located in a coverage area, as well as a mobile reference carried by a search team are disclosed. A system for guiding a search team to an unknown positioned transmitter that is located within a structure is taught using the present techniques, as well as training a central computing unit, by using actuarial data, so that multi-path errors resulting from fixed or mobile obstacles may be reduced.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

**TITLE: ENHANCED POSITION CALCULATION**  
**FIELD OF INVENTION**

This invention relates to life safety systems where a radio transmitter broadcasts from an unknown location; the unknown location can be estimated using a set of receivers and a signal processing network designed using a neural network or an associative memory.

**BACKGROUND OF THE INVENTION**

The need exists for a highly reliable and accurate system which can locate a radio transmitter in an unknown position in a citywide or local area of coverage. Applications include personal safety from assault or medical causes, roadside assistance, child monitoring for kidnapping recovery, monitoring of the elderly to reduce walk aways, drug enforcement, early release or parolee monitoring, as well as stolen vehicle or stolen equipment recovery. The unknown position radio transmitter broadcasts a signal that reflects off of objects, such as buildings or buses, before arriving at a series of receivers. These reflections cause several versions of the same signal, delayed by different amounts depending on the number of reflections incurred, to be superimposed with one another. This distorts the transmitted signal and, if uncorrected, prevents reception and processing of the signal.

Present systems include inherent drawbacks, such as continual monitoring, which require full time surveillance operation or GPS services which require physically larger units with short battery lives and which must operate outdoors in reasonably good view of several satellites. Stanford Telecom, in "RF Design", October 1992, teaches the use of signal averaging to reduce multi-path errors. "The tracking error is not always the same sign since the multi-path will either subtract or add to the signal depending on its carrier phase with respect to that of the direct signal. In the moving vehicles, multi-path tends to change sign rather rapidly and is noiselike, averaging out in the long term."

In Spread Spectrum Systems, Third Edition, Dixon teaches the use of spread spectrum in time of flight to yield position fix information. Sanderford, et al., in U.S. Patent No. 4,799,062 disclose the use of additional receiving sites so that signals from one or more receiving sites that suffer from delays, due to multi-path errors, can be removed as inputs to a least squares fit algorithm. Sanderford further teaches the use of a mobile reference transmitter carried by a search team which is guided by a central dispatch station. The guidance is provided through a differential term derived from a poll reply of the unknown positioned transmitter. However, this technique requires that the unknown positioned transmitter have two-way communication capabilities.

Global positioning systems also provide radio location capability if connected in a manner to re-transmit latitude, longitude, altitude information to a remote central monitoring station. GPS has several shortcomings as compared to the instant invention for the applications contemplated herein. These include direct signal propagation through the interior or multi-story buildings, the increased size and weight due to the requirement of the inclusion of a receiver as well as a transmitter, and reduced

1 battery life due to the current drain of the element of the GPS receiver. The applications require  
2 physically small devices, long battery life, and imply transmit-only operation. Successful operation is  
3 mandatory, even in a heavily radio frequency shielded environment such as a multi-story high-rise  
4 building.

5 In order to increase the Signal-to-Noise Ratio available to a system receiver from a system  
6 transmitter whose operation is constrained to the preceding conditions, it is desirable to locate the  
7 receiver on a ground-based platform as opposed to an orbital one. The ground-based receiver platform  
8 does have a disadvantage due to a fairly complex radio wave travel path from the system transmitter  
9 (multi-path signal distortion). Urban and suburban multi-path distortion may be quite severe, as it's  
10 cause increases dramatically with each new object inserted into the path from system transmitter to  
11 system receiver (i.e. buildings, vehicles, structures). These objects cause destructive "copies" (echoes)  
12 of the radio signal to be generated each time the signal "reflects" (bounces) off of one. The echoes  
13 arrive at the system receiver later in time than the desired (direct path) signal, causing loss of signal,  
14 or producing erroneous measurements. The analysis of how a particular environment will induce  
15 multi-path distortion is called a "Delay Spread Profile". Delay spread profile analysis shows multi-path  
16 echoes on the order of one to five microseconds are not uncommon in urban and suburban  
17 environments. Delay spreads of this magnitude cause one thousand feet to one mile potential error  
18 to a transmitter's calculated position if error removal tactics are not employed.

## 19 SUMMARY OF THE INVENTION

20 A first object of the invention is to overcome the problems of the prior art discussed above.

21 The second object is to achieve a position fix accuracy and reliability appropriate for life safety  
22 applications.

23 A third object of the invention is to locate a low Signal-to-Noise Ratio transmission with  
24 increased accuracy.

25 A further object of the invention is to be able to locate a transmitter which is located inside of  
26 a multi-story building. This process may be further aided by the employment of a search team  
27 equipped with a mobile reference unit.

28 A further object of the invention is to remove position fix errors which result from fixed  
29 obstacles.

30 Another object of the invention is to remove errors from mobile obstacles. This requires either  
31 additional receivers or the ability to employ time diversity.

32 A further object of the invention is to correct drift errors which result from imperfect time  
33 references contained within the various system elements as well as to provide a point or points of  
34 common synchronization for the computation of Relative Time-of-Arrival readings.

35 A further object of the invention is to learn the signature of an area or areas frequented by a

1 user to increase the accuracy of a position fix made at a future time in that same location.

2 A further object of the invention is to provide intelligent averaging or weighing of previous  
3 position fixes in order to further enhance the accuracy of the most recent position fix.

4 Another object of the invention is to provide cues appropriate to guide a search team equipped  
5 with a mobile reference unit to find a transmitter of unknown position.

6 All radio location systems must provide at least two major functions: (1) to accurately determine  
7 a first arriving radio signal or to determine some appropriate attribute of a radio signal which can be  
8 used to determine a transmitter's position, (2) computational techniques which are appropriate to  
9 convert the information gained into useful position fix information which typically includes latitude,  
10 longitude and altitude. The invention and the embodiments disclosed herein are concerned with this  
11 second area of functionality required in a radio location system.

12 The disclosed invention uses historic information, training sessions, special system reference  
13 cues, as well as ongoing learning in order to enhance a radio location system's position calculation  
14 accuracy. The invention further seeks to reduce overall system drift errors caused by the imperfection  
15 of the time bases used in the various system elements.

16 Tests were performed in both urban and suburban areas with a direct sequence spread  
17 spectrum, time of flight measuring system. The said system was a transponding return time of flight  
18 measurement measuring device. It used approximately 1.2 megachip per second, 127 chips and a  
19 sliding correlator to acquire the signal. In downtown areas large distance measurement jumps of 600  
20 to 1200 feet were logged. These jumps were repeatable if the receiving unit was brought into the same  
21 range of proximity of the previously noted jump. When observing the immediate surroundings of areas  
22 in which these jumps occurred, it was consistently noted that large buildings or structures obscured the  
23 direct path of the signal. The sliding correlator was still able to acquire a first arriving signal, however,  
24 said signal was delayed by the added propagation path forced by the large building or structure.  
25 Therefore, even a perfectly accurate time of flight receiving device would yield errors due to the  
26 geometry of the environment in which the system was operated. In order to increase the accuracy and  
27 reliability of the positioning information therefore requires additional tactics which use both past history  
28 and other system cues in order to overcome both fixed and moving radio obstacles.

29 The prior art does not teach overcoming these problems using the techniques of the present  
30 invention. Stanford Telecom does not teach the user of historic information to create a data base or  
31 weightings in order to correct future readings. Dixon does not teach the use of training, or historical  
32 data base information, or pointing functions derived from past information or other system cues in order  
33 to enhance the calculation of the position fix. Sanderford does not disclose the user of historic  
34 information in order to enhance the accuracy of the position calculation.

35 Furthermore, although GPS systems do not use historic information or of error weightings in  
36 order to enhance the accuracy of the position fix calculation.

37 The instant invention uses one-way communication and can further input the mobile reference

1 Time-of-Arrival/Relative-Time-of-Arrival unit into a neural network, thereby enhancing information  
2 available to compute a position fix.

3 The instant invention is intended to increase the accuracy of a radio location system through  
4 computational means which is located at some central receiving site. The inputs to these enhanced  
5 calculation devices/methods can be any one of a number of position determination measuring  
6 techniques. For example, Time-of-Arrival information or Relative Time-of-Arrival information can be  
7 derived from chirp spread spectrum, pulsed radio, a combination of waved shaped pulse with phase  
8 information, phase information from a sin wave with no wave shaping, or by the correlation either serial  
9 or parallel of a direct sequence spread spectrum transmission. In addition to the Time-of-Arrival  
10 Techniques, multiple antennas can be used to establish the X, Y, Z phase of a received H field or E  
11 field signal. Electrically rotated phase antennas such as VOR may also be Employed. The invention  
12 and techniques described herein may also be employed to enhance the position location accuracy of  
13 cellular type radio systems by the use of the amplitude, phase, and antenna quadrant information  
14 available. Further, any combination of the above techniques may be used to further enrich the  
15 information available to the computational elements disclosed herein.

16 All of the techniques disclosed herein can benefit from an initial training session, although the  
17 training session may actually be accomplished during the system's normal operation. One such training  
18 session consists of driving a vehicle around a city or suburban area or area of coverage interest. Such  
19 vehicle would be equipped with a reference transmitter. In addition, the vehicle would be equipped with  
20 a technique, or techniques, capable of independently establishing the accurate location of the vehicle.  
21 In this manner, the so equipped vehicle would communicate both independent position information as  
22 well as beacon transmissions capable of being measured by the radio location system's distributed  
23 receivers. This training information could be used to create table or matrix lookup correction factors or  
24 to establish the appropriate weighing coefficients in a neural network. This information could be  
25 collected and used in real time or appropriately post processed by any one of the neural network  
26 training techniques as shown in the art. Such neural network training techniques include, but are not  
27 limited to, back propagation, recurrent back propagation, probabilistic neural network, learning vector  
28 quantization and k-means clustering.

29 In addition to the either initial or ongoing training, other specific training may be employed. A  
30 user of the radio location service who carries a UPX on their person may either initially or periodically  
31 call into a central station operator or to a voice command-type system. At that time, the user may  
32 verbally or numerically indicate his or her physical location at that time. The user would then initiate  
33 a sequence of transmissions on their UPX. The user may stand in one position or may walk in a slow  
34 circle in order to enrich the variety of resulting position fixes received by the central monitoring  
35 processor. An alternative to calling in to a system, the UPX may be equipped with a small radio  
36 receiver or a local H-field receiver. Upon the UPX receiving a properly coded message, the UPX may  
37 automatically invoke a training burst of transmissions. The initiating devices may be located in the

1 user's office or if the UPX used is affixed to an inanimate object, the initiating device may be located  
2 in a known or a suspected path of the UPX travel. The initiating device may be encoded with  
3 information relating to latitude, longitude and altitude so that the central processing can associate with  
4 this "known" information with the position fixes directly resulting from the initiating device's forced  
5 training burst sequence. Either of these techniques may be used to establish an electronic "fingerprint"  
6 of likely UPX locations which require a high degree of accuracy in subsequent position fix calculations.  
7

8 In addition to potential initial training sessions, fixed references may be installed in part or all  
9 of the coverage area. These fixed references would either transmit their known latitude, longitude,  
10 altitude position or transmit their ID which would later be associated with known latitude, longitude,  
11 altitude information in some central database.

12 Further, these fixed references may be made a portion of the receiving unit's which are  
13 distributed across a city or coverage area. These fixed references may be at similar altitudes, but  
14 would benefit from being held at various altitudes in order to enhance Z-axis position determination.

15 Since these fixed references are at known, stationary locations, their resulting Time-of-  
16 Arrival/Relative Time-of-Arrival information may be used to calibrate the system or to provide further  
17 training to a neural network. Further, these fixed references may be used to remove or compensate  
18 drift caused by the various system elements. In either a Relative Time-of-Arrival or Time-of-Arrival radio  
19 location system, an accurate time base is used as a reference to provide time of flight information. Any  
20 drift or inaccuracy in these time references will cause system errors.

21 The present invention provides additional accuracy by providing an estimate of a position from  
22 which a transmitter is transmitting even when not all of the receivers receive the transmitted signal.  
23 Furthermore, not all receivers have to receive all training signals either.

24 Some position/ location errors in the location system can be on a periodic or seasonal basis  
25 or the result of local weather systems. Time-of-day as well as time or season may be further input to  
26 the neural network/ processor. The position computing means may then use previous daily or yearly  
27 historic information to enhance the accuracy of the position.

28 A search team may also be employed to locate a UPX for life safety applications. The search  
29 team can force a transmission from their MRX within certain known locations, they also can receive  
30 those UPX transmissions from the MRX unit which they carry. That information may be combined with  
31 the search team's absolute reference position. Such absolute position may be entered by the search  
32 team and transmitted by the MRX or via any method that would accurately determine and communicate  
33 the mobile reference team's position. This technique may be particularly useful in a multi-story building  
34 whereby the search team would initiate a reference transmission once they enter the first floor of the  
35 target building.

36 If any of the computing elements, as disclosed herein, predict that the UPX is in motion, then  
37 signal averaging may be invoked in order to reduce Gaussian type error terms in the  
Time-of-Arrival/Relative Time-of-Arrival readings. Further, a simple calculation can be provided to

1 monitor and predict the direction and velocity of the UPX. If a neural network is used to provide the  
2 position fix calculation, then the last M position fixes of a particular UPX may further be used as input  
3 to the neural network's matrix. In this manner, the neural network may take advantage of the past M  
4 readings in order to enhance the position fix accuracy of the most recent received transmission.

5 The position fix processor will input either Relative Time-of-Arrival or Time-of-Arrival or time  
6 difference information from each of the receivers obtaining a message from a particular UPX. In  
7 addition, the receivers may also provide signal-to-noise ratio information and antenna quadrant  
8 information. Receivers may be outfitted with four or eight directional antennas. If four or eight  
9 independent receivers are utilized, then any one or several of the four or eight receivers may provide  
10 valuable radio location information to the position fix processor.

11 The use of an error correction table, a matrix lookup technique, or the use of neural network  
12 processing techniques will increase the accuracy of the position fixes generated. This means that  
13 signals received or signal-to-noise ratio may still be adequate to provide the services as contemplated  
14 herein. The ability to work with low signal-to-noise ratio signals will facilitate the use of more distant  
15 receiver sites and enriched information gathered from receiver sites more distant than a first ring  
16 constellation of receivers. Using low signal-to-noise ratios also provides the ability to locate a  
17 transmitter deep within a multi-story building. A typical home may represent approximately 10 dB of  
18 signal attenuation at 900 MHz. A multi-story building can easily cause 30 dB of signal attenuation.  
19 This attenuation must be either overcome by transmitted power, closer receiver sites, reduced  
20 information bandwidth, or longer transmissions, making the position fix processor tolerant of poor and  
21 noisy signals, or any combination of these techniques.

22 Multi-path/obstacle removal may be accomplished by the processor methods disclosed herein  
23 and fall into two categories: 1) fixed obstacle and 2) mobile obstacles. A fixed obstacle is a large  
24 building or structure that will cause a multi-path reflection which is repeatable over some long period  
25 of time. The initial training sessions isolate these anomalous added paths and adapt them to the neural  
26 network or error correction matrix or table. Once the anomalies are learned, the added path and error  
27 term actually becomes useful information to enhance the accuracy of the position fix calculation.

28 Mobile obstacles are compensated for by direct tactics. One of three tactics may be employed  
29 to reduce the errors from such obstacles. Additional receivers may be used such that a receiver  
30 suspected of a multi-path error may be eliminated from a position fix calculation such as a least squares  
31 fit. In the alternative, when using a neural network for the position fix calculation, the network may  
32 automatically discount or proportionally reduce the weighing of the input from a suspect receiver. If  
33 a mobile obstacle moves in a relatively short period of time then time  
34 diversity may be employed. In this case, if a particular reading is suspect or error due to a mobile  
35 obstacle, a method seeks to obtain further position fix readings which may be unaffected by the mobile  
36 obstacle. As a final alternative, multi-path errors, short or long, can only increase the apparent time  
37 of flight/TOA/RTOA readings since the multi-path error is caused from a reflection which causes the



1 traveled path to be longer than the geometric point-to-point path. Methods are disclosed herein which  
2 intelligently reduce the Time-of-Arrival/Relative Time-of-Arrival until the triangulation or least squares  
3 fit model yields the lowest error term or an error term of an acceptable level.

4 The position processor means may be implemented using a neural network, a correction factor  
5 matrix, or a correction factor lookup table. Neural networks provide inherent interpolation between  
6 previously learned data points so that even if unexpected or error prone inputs are encountered, the  
7 neural network will automatically provide the best fit to its past training experience. When using the  
8 matrix lookup or table lookup techniques, additional methods must be provided to correct multi-path  
9 errors if a UPX is located in between two or more matrix points, or in between the two most likely table  
10 lookup points. In these cases, additional interpolation can be used to enhance position calculation  
11 accuracy. Interpolation algorithms include linear interpolation, linear approximation, linear regression  
12 simultaneous equations, a system of differential equations, or the like.

13 The neural network will directly yield outputs including latitude, longitude and altitude. The  
14 matrix lookup or table lookup must input to other position calculation algorithms as are known in the art.  
15 These include triangulation, multi-lateration, least squares fit algorithms and the like.

16 If only one or two of a constellation of phase repeaters are able to successfully receive a weak  
17 signal, the remainder of the nearby phase repeaters can be made more sensitive through a windowing  
18 function, provided that the UPX transmits on a sleep interval pattern which is known to the necessary  
19 system elements. In addition to this, the chip position would also be known within one or several chips  
20 which could be used to lower the amount of search time required by other receivers, and hence  
21 subsequently increase the available dwell time and therefore increase signal-to-noise ratio. Further,  
22 since the frequency of the UPX would be accurately known, the other receivers would not have to  
23 perform frequency searches and/or may further reduce their I.F. bandwidth.

24 If the ID of a UPX can be decoded by one receiver, it may be assumed that signals  
25 simultaneously reaching other receivers, within a certain proximity, are also from this same transmitter.  
26 This can cue the control processor to utilize TOA/RTOA information which may be of poor quality but  
27 useable. The processor techniques disclosed herein are compatible with poor quality TOA/RTOA  
28 information. It is possible for a receiver, which is properly windowed by means as known in the art, to  
29 yield RTOA/TOA information with a SNR too poor to yield data. This is due to the fact that a bit time  
30 is only a small portion of a message time and every (or nearly every) bit must be correct in order to  
31 properly decode a UPX's ID. If no error correction/message redundancy is used, then:

$$P_{f(\text{message})} = P_{f(\text{bit})} * N_{\text{bits}}$$

33 whereas TOA/RTOA information may be collected over an entire message time. This provides an SNR  
34 advantage of approximately:

$$10 \log \frac{\text{message duration}}{\text{bit duration}}$$

37 for a 60 bit message, this would provide an 18 dB advantage, which may be the margin necessary to

1 get a position fix within a building.

2 Typically, the first arriving signal in a time of flight radio location system yields the most  
3 accurate position fix. This first arriving signal leads a complex pattern of signal peaks and valleys called  
4 a delay spread profile. A typical delay spread profile has multiple peaks within its envelope. These  
5 peaks are caused by the reflectors which are in the vicinity of the Unknown Position Transmitter. In  
6 communication systems, these peaks are desirable because they contain additional energy for a  
7 receiver to improve signal-to-noise ratio and more readily decode data. Since these additional peaks  
8 are caused by reflectors in the vicinity of the UPX, they may also be considered as a "signature" or  
9 "fingerprint". This additional information may be able to provide cues to an appropriate central  
10 processing device. Neural networks are especially well suited for such imperfect and complex  
11 information. A RAKE receiver designed for time of flight usage would supply information from multiple  
12 peaks, and perhaps valleys as well, to the central processing unit. This information would associate  
13 the amplitude of a peak or valley with its associated time delay from the initially arriving signal. This  
14 signature information is particularly useful when previous training sessions have provided historic  
15 information in order to compare a present reading against.

16 The system of receivers distributed through a particular coverage area must develop time  
17 references from which to compare the position of the arrival of a transmission from a UPX. Several  
18 techniques to accomplish this antenna grid calibration/synchronization are described herein. For  
19 example, a GPS receiver can be outfitted with a real time reference. This reference is tightly coupled  
20 to the accuracy of the cesium atomic clocks used by the GPS satellite system. The output of such a  
21 receiver can produce one second time ticks such that every system receiver outfitted with a GPS  
22 receiver would simultaneously receive a "beginning of one second interval" time marker as well as a  
23 high frequency accurate clock output period. Any further time offsets from GPS receiver to GPS  
24 receiver may be caused by the varying distances between that receiver and other associated receivers.  
25 These can be corrected through either an initial fixed offset or by differential GPS techniques which are  
26 well known in the art. As an alternative to a GPS reference, one or more master references may be  
27 installed which can provide evenly distributed time markers which can then in turn calibrate the internal  
28 time base of the receivers located in a coverage area. The synchronizing transmitter may be one single  
29 transmitter located at an elevation appropriate to be received by all receivers of the coverage area.  
30 Alternatively, multiple synchronizing transmitters may be placed at lower elevations and distributed  
31 throughout a coverage area such that all receivers are within radio view of a synchronizing transmitter.

32 Alternatively, the fixed position reference transmitters, FRX's, may be distributed throughout a  
33 coverage area such that every receiver is capable of receiving a reference message from one or more  
34 of the FRX's. These FRX's do not recalibrate the internal time base of the receiver, rather they provide  
35 a relative time stamp from which to measure subsequent UPX transmissions. In addition, techniques  
36 are described herein which allow for the second order and third order compensation of a receiver's  
37 internal time reference via algebraic and neural network means.

1 This compensation means may be implemented as a pre-processor or pre-neural network to  
2 the position determining neural network. The pre-neural network may employ a constant retraining  
3 method using the fixed references as known. This would reduce the complexity of the subsequent  
4 position determining neural network processor. Further, some or all of the receivers in a coverage  
5 area may be equipped with an associated transmitter. This transmitter transmits at a fixed interval  
6 based on the receiver's interval time base. This information may be further used to compensate for the  
7 drift of the receiver's internal time base. Additionally, during these specially transmitted messages, the  
8 receiver's internal reference counter may be transmitted as part of these periodic messages. This  
9 provides additional information to compensate out drift errors due to the receiver's internal time base.  
10 This compensation can be accomplished either algebraically or via neural network means as described  
11 herein. An additional benefit of such techniques is that changes in overall system propagation path and  
12 propagation speed variations will be automatically compensated for as the system compensates for the  
13 drift resulting from receiver time base imperfections. Neural networks may further be able to  
14 compensate the drift on a third order or greater basis and may even take into consideration variations  
15 associated with time of day or time of season on a receiver's time base and the system as a whole.  
16 This would have the effect of allowing the use of lower cost time references and possibly even  
17 uncompensated crystals. To this end a receiver may measure its operating temperature and send that  
18 information to the central processing device in order to enhance such temperature drift corrections.

19 The fixed reference transmitters can be used by the central processing unit to correct drift on  
20 a higher level basis. Since the central processing unit will know that the fixed reference transmitters  
21 do not move, it may also adaptively correct all of the readings from fixed reference transmitters such  
22 that the latitude, longitude, altitude position fixes remain constant at their known points of origin. In  
23 order for the central processing unit to effect such constant positions of the fixed reference transmitters,  
24 even in the face of receiver time base drift, correction factors must be provided either methodically or  
25 by altering the weights on a neural network's synopsis. The neural network system will automatically  
26 make these system-wide corrections. The same corrections may be applied to the reception from UPX  
27 devices. These system-wide corrections will automatically correct for errors which might have been  
28 caused by either seasonal, propagation path, propagation speed, or time base drift and yield more  
29 accurate position fixes for UPX devices.

### 30 BRIEF DESCRIPTION OF THE DRAWINGS

31 A more complete appreciation of the invention and many of the attendant advantages thereof  
32 will be readily obtained as the same becomes better understood by reference to the  
33 following detailed description when considered in connection with the accompanying drawings, wherein:

34 Figure 1 is a system diagram of the entire system showing the receivers, with optional  
35 directional antennas and transmitters, receiving radio signals into a central processing device (CPD)

1 from an unknown position transmitter (UPX) and, optionally from a mobile reference transmitter, a fixed  
2 reference transmitter, and a grid synchronizing transmitter;

3 Figure 2 is a schematic illustration showing the shortest path and a reflection of a transmitted  
4 radio signal from a UPX off of a fixed object;

5 Figure 3 is a schematic illustration showing a reflection of a transmitted radio signal from a UPX  
6 off of a temporary obstacle;

7 Figure 4 is a schematic illustration showing a training transmitter and a UPX broadcasting  
8 training signals from multiple locations to train the network in the CPD;

9 Figure 5 is a schematic illustration showing a neural network with reference time and position  
10 cue inputs and latitude, longitude, altitude and accuracy outputs;

11 Figure 6 is a correction matrix containing correction factors for areas having known errors;

12 Figure 7 is a table of correction factors, indexed by latitude, longitude and altitude, of positions  
13 having known errors;

14 Figure 8 is a flow chart illustrating a method for enhancing a position fix by reducing reference  
15 times of arrivals that reduce convergence error;

16 Figure 9 is a schematic illustration showing how a single UPX in a building can produce multiple  
17 apparent point sources to receivers outside of the building;

18 Figure 10 is a graph of amplitude of a delay spread profile from a UPX representing arriving  
19 signal over time;

20 Figure 11 is a schematic illustration showing a synchronizing receiver using a GPS reference  
21 and a counter which is reset on a preset repetitive time interval;

22 Figure 12 is a schematic illustration showing a synchronizing receiver using a periodic reference  
23 transmission;

24 Figure 13 is a schematic illustration showing a synchronizing receiver using a fixed reference  
25 transmitter; and

26 Figure 14 is a graph showing two hyperbolic lines of position with correction factors between  
27 two receivers.

## 28 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

29 Figure 1 shows a system overview of the present invention. The central processing device 100  
30 collects information from several receiving sites 102. The central processing device 100 uses historic  
31 information and other cues in order to enhance the accuracy of a position fix calculation. The output  
32 of the central processing device 100 is essentially X, Y and z, and more particularly latitude, longitude,  
33 altitude and, optionally, accuracy of position fix conversions, velocity of a UPX or heading of a UPX.  
34 The central processing device may derive improvements from a table or matrix of correction  
35 coefficients. The central processing device may also be a neural network device whereby previous

1 history is represented as weighing on the neural, network's synapses. The central processing device  
2 also benefits from other information and cues 101 such as time of day, time of season, humidity, known  
3 location of receivers, GPS data, temperature, previous determination of velocity in vector, and direction  
4 vectors.

5 The receivers 102 are synchronized by a grid synchronization transmitter 106, GPS satellites,  
6 or the like. The purpose of the overall grid synchronization is to provide a consistent and accurate  
7 reference by which to compare arriving signals from other system elements.

8 The purpose of the radio location system as taught herein is to accurately determine the  
9 location of an Unknown Position Transmitter, UPX, 103. The UPX may be a transmit-only device, in  
10 which case transmissions are either periodic, based on some internal time reference and/or  
11 transmissions, or via initiation by some outside stimulus, including a request for help. The UPX may  
12 also be a two-way communication device whereby a transmission is initiated also upon the reception  
13 of a polling signal. Lastly, the UPX may be implemented as a transponder whereby round trip  
14 Time-of-Arrival measurements may be provided. The Unknown Position Transmitter would typically  
15 include in its transmitted message an identification code as well as other data. This data may include  
16 the city of origin code, status information such as battery low, device OK, a modulo transmission  
17 number counter, or a supplier code in order to logically isolate systems which may be provided by two  
18 independent suppliers/manufacturers. The data may further contain an indication of the time of the next  
19 transmission.

20 This message would typically be forwarded by a third detection/error correction code to  
21 enhance the reliability of the received message. In addition to this information, the status of reference  
22 fields would be supplied to indicate medical emergency, roadway assistance, police emergency,  
23 kidnapping, tamper, etc.

24 Upon the receipt by the central processing device of an initial message from a UPX 103, the  
25 dispatch operator at the central station may further guide a search team equipped with a mobile  
26 reference transmitter, MRX 105, in close proximity of the UPX 103. Once the mobile reference device  
27 becomes near the unknown positioned transmitter, the error terms created by multi-path reflections, as  
28 well as other environmental factors, will become very similar. The central processing device may  
29 thereby accurately compute the differential vector which represents the path and direction which a  
30 search team must travel in order to intersect the UPX 103. The MRX may also be provided with a  
31 transponder mode to repeat the UPX transmission. This repeated transmission has an added path  
32 delay compared to the MRX. This added delay forms a radius about the MRX. The resulting sphere  
33 may be used by the central monitoring station to augment the position calculation of the UPX.

34 The system may further benefit by one or more fixed reference transmitters, FRX's, 104. The  
35 purpose of the fixed reference transmitters is to provide transmissions from known fixed positions  
36 within a particular coverage area. These fixed reference transmitters are used by the central  
37 processing device 100 order to calibrate system errors due to varying environmental conditions as well

1 as drift caused by imperfect time bases within the various receivers.

2 A receiver 102 may provide to the central processing device 100 information which includes  
3 Time-of-Arrival, TOA/Relative Time-of-Arrival, RTOA, signal-to-noise ratio, SNR and antenna quadrants  
4 (A,B,C,D) 108. The receivers 102 may optionally be equipped with multiple antennas separated into  
5 four or eight quadrants 107. If each antenna is provided with its own independent receiver, each  
6 receiver may provide different and useful Time-of-Arrival information.

7 Alternatively, an antenna may be selected which yields the strongest signal. As a further  
8 alternative the antenna may be selected which provides the earliest arriving signal. Cellular telephone  
9 systems, for example, provide both signal- to-noise ratio information as well as antenna quadrant  
10 information. With the enhanced position calculation methods taught herein, this information may be  
11 adequate to provide accurate position fixes of cellular telephone devices in a particular coverage area.

12 In order to support the windowing function of a receiver, the transmitter may, as a part of its  
13 data message, include bits which indicate the time duration until the next transmission by that UPX.  
14 As an alternative, the UPX may transmit on regular or on a known transmission interval pattern. Even  
15 is a pseudo-random pattern was used by the transmitter, a receiver knowing that pattern would be able  
16 to take or more readings from the UPX, and from the time separation, predict the next occurrence of  
17 a UPX transmission.

18 Typically in a radio location system using a grid of fixed receiving 102 towers, each tower must  
19 be surveyed for precise latitude, longitude, altitude positions. This information is used in a  
20 triangulation, multilateration, least squares fit algorithm. As an alternative to this time consuming and  
21 costly process of receiver site survey, the fixed reference transmitters, 104, may function to serve this  
22 purpose. The fixed reference transmitters would themselves have to be accurately site surveyed for  
23 latitude, longitude and altitude, however. Since the absolute position of the fixed reference transmitters  
24 104 would be known, the central processing device 100 would be able to adjust the resulting position  
25 fixes to coincide with the true position of the fixed reference transmitters. Providing the fixed reference  
26 transmitters 104 are adequately distributed through a large area of interest, the system would be able  
27 to automatically self-calibrate its position fix references. This feature may be useful for quick  
28 deployment or temporary deployment systems where the added step of site surveying every receiver  
29 may be too time consuming. GPS interface to these devices would remove the need for a survey and  
30 allow for rapid deployment to help search teams or provide temporary coverage.

31 As is shown in Figure 2, some errors will be consistent due to the overall geometry and position  
32 of fixed obstacles in a certain area. When UPX 103 transmits a signal to Receiver 102, its direct  
33 point-to-point path 203 is blocked by fixed obstacle 201. Instead of the first arriving signal being equal  
34 to the distance between the UPX 103 and the Receiver 102, it is instead equal to that true distance  
35 plus a relatively repeatable Time-of-Arrival error 206. This Time- of-Arrival error 206 is equal to the  
36 effective path increase taken by the signal in order to be received by Receiver 102. This Time-of-Arrival  
37 error 206 may be estimated as a guess by swinging two arcs. One arc 207 would begin at the UPX

1 103 with the radius center at the receiving antenna 102. The other arc 208 would begin at UPX 103  
2 with radius point of origin of 209. This would effectively swing dashed line 204, into the position of  
3 dashed line 205. The difference in position of the two arcs, 207 minus 208, would equal the Time-  
4 of-Arrival error 206. This fixed error could be learned and stored in a correction factor table, a  
5 correction factor matrix or in the weightings of synapses in a neural network.

6 As is shown in Figure 3, errors in position fix accuracy may also be caused by temporary  
7 obstacles such as moving automobiles, buses, trains, etc. In this example, the direct path of  
8 transmission from UPX 103 to receiver 102 is blocked by a bus noted as 301. Instead of the signal  
9 from the UPX 103 arriving directly, it's first leg of travel 305 is reflected off of bus 301. The reflection  
10 306 then bounces off of building 304 to finally travel a path 307 to receiver 102. These added  
11 reflections again add an error term which is in excess of the direct theoretical point-to-point path  
12 traveled. Several tactics may be employed to eliminate the errors due to temporary obstacles. One  
13 such tactic is to deploy a number of receiving towers which is greater than that required to provide the  
14 position fixes desired. In this manner a receiver, or receivers, suspect of error due to additional path  
15 travel artificially created by a blocking obstacle, may be eliminated from a calculation or may be lowered  
16 in weighing by a neural network. As a further alternative, short term diversity may be used such that  
17 subsequent transmissions from a UPX may no longer be blocked by a particular temporary obstacle.  
18 Lastly, rule based methods may be utilized to intelligently reduce the effective travel path measurement  
19 in a manner to increase the position fix accuracy.

20 Prior to normal operation of the central processor, a training session, depicted in Figure 4, is  
21 utilized to provide actual Time-of-Arrival and Relative Time-of-Arrival information. This training may also  
22 proceed over the normal operation of the system's lifetime. The purpose of the training is to associate  
23 transmissions from a UPX with independently derived position information which accurately indicates  
24 the actual position of the UPX. Typically, a mobile team or a training vehicle 400 would be equipped  
25 with a training transmitter 401. The team or the vehicle would then traverse the coverage area of  
26 interest. The mobile team or vehicle would particularly concentrate in areas of high multi-path  
27 reflectors such as multi-story buildings 403. As the vehicle 400 drives through path where  
28 transmissions 402 would regularly be made, reference transmissions are made. In Fig. 4, "X"s indicate  
29 the locations of reference transmissions. Each transmission would also coincide with an indication of  
30 actual location of the vehicle.

31 The training transmitter 401 consists of several blocks. First, it must contain a transmitter radio  
32 beacon 406, which is either an Unknown Position Transmitter, UPX 103, or a MRX 105, where the  
33 transmitter radio beacon is capable of being located by remote receivers. In addition, the vehicle would  
34 house some absolute reference position determining means 408. Such means may include one or more  
35 of the following: "map matching", GPS, dead reckoning, calibrated odometer, user call-in, etc. This  
36 absolute reference would typically be connected to a data transmitter 407. Alternately, a voice link may  
37 be used for an operator to call in absolute reference information. In a further alternative, if the absolute

1 reference position determining means 408 is not fitted with a data transmitter 407, then the radio  
2 beacon 406 can transmit absolute reference position information directly.

3 In addition to the training noted herein, a user may call in their position and simultaneously  
4 enable a transmission from a UPX 103. This is particularly useful in situations where increased  
5 accuracy is desired. This can often be in places where a user typically frequents, such as the home  
6 or an office in a multi-story building 403.

7 As shown in figure 5, several approaches may be taken to accomplish the enhanced position  
8 calculations as described herein. The preferred embodiment of the instant invention uses a neural  
9 network approach. A typical neural node is shown in inset 517. Each neuron has one or more inputs  
10 506 which are summed into a node 508. The resultant sum is output at 509. Each input is assigned  
11 a weighing factor 507. The weighing factor may be positive or negative, and may be accomplished with  
12 actual resistors and summed to additive or subtractive nodes of an amplifier. Alternatively, these  
13 "resistors" may be coefficients stored in a matrix. The coefficients may have as much resolution as is  
14 defined by the number of bits provided. Neural network software is available which can run on  
15 conventional Von Newman processors. There is also dedicated parallel processing hardware available  
16 which performs calculations in digital form. Lastly, fully analog integrated circuits are being developed  
17 which contain hundreds or thousands of individual nodes.

18 A neural network is able to accomplish its function after one or more training sessions. The  
19 training sessions adapt the weighing factor magnitude and sign until the output or outputs yield some  
20 desired response. A number of training methods exist and are noted herein. It is anticipated that  
21 further training methods will become available. Any method which is able to effectively modify the  
22 weighing factors such that future inputs to the network are able to yield accurate outputs, is viable for  
23 this application.

24 The neural network in the preferred embodiment consists of input layer 500, a hidden layer  
25 502 and an output layer 504. The input layer 500 is connected to the hidden layer via multiple  
26 associations such as 501. The hidden layer 502 is associated with the output layer through multiple  
27 associations such as 503. The output of the neural network provides latitude, longitude, altitude and  
28 optionally EMS accuracy estimates, 505.

29 There are several input options to the input layer 500 of the neural network. These inputs are  
30 predominantly from receivers remotely located in the coverage area of interest. Two-way transponding  
31 UPX's can provide Time-of-Arrival information from spherical lines of position 512.

32 Alternatively, Time-of-Arrival information relative to a GPS absolute reference located at each  
33 receiver 513 may be provided as an input to the neural network. As a further alternative, time  
34 differences, TD's, may be computed prior to providing this information to the input layer of the neural  
35 network. The TD can be computed as a Relative Time-of-Arrival from receiver N minus Relative  
36 Time-of-Arrival from receiver N + M. As a further alternative, Relative Time-of-Arrival information from  
37 a receiver "X" 515 may be directly provided to the input layer 500 of the neural network. The



1 information provided from each receiver may include one or more of the following: TOA/RTOA,  
2 correlation function leading edge slope SNR, ANT (A,B,C,D) and/or multiple RTOA/TOAs from rake type  
3 receiver, and/or carrier phase, modulation phase, data position.

4 Other system cues 516 may be provided to the neural network's input layer 500. Such system  
5 cues may include a real time clock, possibly in sub-second increments. A time of day/time of year  
6 clock, barometric pressure, atmospheric humidity, or any other parametric which may effect the Time-  
7 of-Arrival of a radio wave from a UPX 103.

8 Most applications would be such that the UPX sends multiple transmissions. These multiple  
9 transmissions will benefit by temporal diversity. The neural network may take advantage of this  
10 additional temporal information by feeding back 510 latitude, longitude, altitude and EMS accuracy  
11 estimation information to the neural network's input layer 500. If more than one previous reading is  
12 desired for this purpose, a first in, first out, FIFO, 511 may be used to buffer "N" readings from a  
13 particular UPX. In this manner, signal averaging may be employed and reduce multi-path errors which  
14 are Gaussian or noise like in nature. It is known in the art that transmissions from moving vehicles tend  
15 to have multi-path errors which average out. Further, these past "N" readings may be used develop  
16 trend information such as velocity and direction vectors.

17 Some neural network training methods can continue to run during the normal operation of the  
18 system. These ongoing algorithms can further modify the weighing factors in order to enhance the  
19 accuracy of the position fixes provided. Such algorithms can be further enhanced by deploying  
20 transmitters in fixed locations throughout a coverage area, fixed reference transmitters.

21 As a further alternative to a neural network approach, equivalent functionality can be derived  
22 by various associative memory techniques. The associative memory, like the neural net, also require  
23 an initial and/or ongoing training process. The associative memory may also be equipped with similar  
24 inputs as described herein as well as the same outputs.

25 The inputs to the neural network may also include multiple peak/valley information from a RAKE  
26 type receiver. This information would be in the form of amplitude versus time delay from some  
27 reference point. A desirable reference point would be that of the first arriving signal of the delay spread  
28 profile. Further, carrier phase, data bit position- or data modulation phase information may also be  
29 provided to the inputs of the neural network. This information may be particularly useful for cellular  
30 radio telephone type systems where chip code position and direct sequence information is not available.  
31 This phase information in combination with the Signal-to-Noise Ratio and antenna quadrant information  
32 are all available or can be derived from a cellular receiving node. This information, when enhanced by  
33 the neural network, or by the other processor means as described herein, will provide increased  
34 accuracy position fixes. For non-cellular telephone type systems. this carrier phase, data bit position,  
35 data modulation and phase information may be used in combination with other cues such as time of  
36 flight information from a direct sequence system.

37 Figure 6 shows a correction factor matrix used to enhance an estimation of the location from

1 which an Unknown Position Transmitter transmitted. As an alternative to the preferred embodiment,  
2 conventional methods such as triangulation, multilateration and least squares fit may be enhanced by  
3 the use of historic information and training to develop a correction matrix 600. This matrix maps into  
4 the latitude 601 and a longitude 602 of the coverage area of interest. The resolution of the grid pattern  
5 must be great enough to isolate anomalies due to multi-path reflectors which tend to cause repeatable  
6 errors. Each storage node of the correction matrix may contain gross latitude, longitude and altitude  
7 correction factors or may contain finer correction factors to Time-of-Arrival/Relative Time-of-Arrival  
8 readings from one or more receivers prone to repeatable half errors due to fixed obstructions.

9 When a UPX 103 first emits a beacon signal, a conventional method produces an initial  
10 uncorrected position fix. This initial position fix is used to perform a table look-up from the correction  
11 matrix. The correction factor or correction factors are then applied to the previous  
12 Time-of-Arrival/Relative Time-of-Arrival prior to recomputation. In the alternative, the correction factor  
13 may contain gross corrections of latitude, longitude, and altitude which can then be directly applied to  
14 the first position fix calculation.

15 In a situation where a UPX is not located directly in the center of a particular matrix square,  
16 interpolation means may be applied in order to further enhance the accuracy of the correction. In  
17 addition, a system of simultaneous equations or differential equations may be employed. In this  
18 example information from grid squares 604 through 609 would be used as inputs to simultaneous  
19 equations or differential equations in order to best provide a corrected position fix.

20 As a further alternative, localized areas within the overall coverage area may be identified as  
21 being prone to repeatable errors. These localized areas may be stored in a correction table 700, as  
22 is shown in Figure 7. Upon an initial position fix table entries representative of latitude, longitude and  
23 altitudes 701 may be searched to determine if the present position fix is near one of the previously  
24 stored entries. If a match or close match is found the table entry can be read. The table entry may  
25 contain the same type of gross or fine correction factors as were described in Figure 6. The overall  
26 correction procedure would also be the same as noted in Figure 6. If a correction table is used and  
27 a reading falls between two table entries, then linear interpolation or any equivalent means may be  
28 used to provide a best fit between two sets of correction factors.

29 By applying the above correction table techniques, corrections would only be made by  
30 exception. If no table entry was found in the proximity of an initial position fix, then that initial position  
31 fix would be provided in an uncorrected form.

32 Rule based methods may also be employed to try to further reduce errors caused by multi-path  
33 delays. The central processing unit may take advantage of the fact that multi-path errors can only  
34 result in additional delay to a Time-of-Arrival or Relative Time-of-Arrival reading. Figure 8 is a flowchart  
35 which illustrates a method of reducing the effects of multi-path error without using tables or matrices.  
36 The method takes advantage of the fact that a multi-path delay may only effect a single receiver. When  
37 a receiver's Relative Time-of-Arrival is used to compute a time difference, then every time difference

1 will have a consistent multi-path error from a particular receiver. The following algorithm takes  
2 advantage of these two rules and may be applied independently or in conjunction with the three  
3 previously noted processing techniques in Figures 5, 6 and 7.

4 First, a computation is made of a position fix 800 if the convergence error 801 is acceptable,  
5 then the error reduction algorithm is not invoked. If the convergence error is  
6 unacceptable, then the algorithm proceeds to step 802. Step 802 incrementally reduces the  
7 Time-of-Arrival or Relative Time-of-Arrival of receiver "N". The position fix is then recomputed. Block  
8 803 determines if the convergence error improved over the previous position fix. If it did, control is  
9 looped back to Step 801, if it did not, control is passed to Step 804. Since the convergence error did  
10 not improve, the fast Time-of-Arrival or Relative Time-of-Arrival of receiver "N" is restored because it  
11 yielded a better position fix. The next step 805 selects the next available receiver in a particular  
12 coverage area. The receivers would likely be limited to those in close proximity to the UPX of interest  
13 thereby reducing the number of iterations required in the algorithm. The algorithm uses decision block  
14 806 to loop back to step 802 until all of the receivers have been sought for improvement. If all of the  
15 receivers have been tried and no convergence error is acceptable per step 801 then the algorithm may  
16 still provide some improvement even though it is not the level of improvement desired. As an  
17 alternative, the reading from that receiver may be eliminated from subsequent position computations.  
18 As a further alternative, Relative Time-of-Arrival or time difference measurements suspected of large  
19 errors may be shunted from the position calculations. This tactic may be used with any of the  
20 computation techniques as taught herein.

21 Figure 9 shows that additional complexities are encountered when trying to locate a UPX 103  
22 in a multi-story building 901. The walls in construction of a building greatly attenuate the signal path  
23 before the transmitted signal reaches a window, door exit or vent. Since the transmitted signal must  
24 follow a common path 904, once the signal exits the building, it will appear to be a point source when  
25 received by the time of flight system's receivers 102. If the signal is strong enough to exit via more  
26 than one window or doorway then multiple point sources will be apparent to the radio location receivers  
27 102. This will force a delay spread profile with leading edge peaks and valleys caused by the  
28 constructive and destructive cancellations of the signals leaving multiple exits in the building 901.  
29 RAKE receiver techniques as disclosed herein may take advantage of this enriched information in order  
30 to better predict the position of a UPX 103 which is located within a single story or multi-story building.  
31 As a further alternative, if the user of a UPX frequents a particular building, they would be able to  
32 invoke a special training session by calling into the central station operator and forcing the UPX 103  
33 into a burst of training transmissions. The central processing unit would be able to store the resulting  
34 signature and use it at a later time to better predict the location of a UPX within that building.

35 Typically, the first arriving information yields the highest degree of accuracy in a time of flight  
36 radio position determination system. In some cases, subsequent information may also be useful. One  
37 such situation is attempting to locate a transmitter within a building. Several leading edge peaks and

1 valleys may result in the received signal due to different signal propagation paths. This delay spread  
2 profile 1000, as depicted in Figure 10, may provide cues to determine exit points from a building as  
3 previously discussed in Figure 9. In addition to these leading edge cues, the other later arriving peaks  
4 and valleys are caused from reflectors which are in the proximity of the UPX. These additional peaks  
5 1003 and valleys 1005 may be utilized to enrich the input to a neural network processing means.

6 The typical delay spread is indicated by Figure 10, where the amplitude is shown in 1002 and  
7 increasing time increments in 1001. Time equals zero is noted by 1004 and is synthetically set by the  
8 first arriving signal which is detected. This profile may be learned by a neural network by invoking a  
9 training session for that purpose.

10 RAKE receiver devices were developed for radio data communications so that signal energy  
11 from multiple peaks could be collected and exploited to increase a signal's effective Signal-to-Noise  
12 Ratio. This benefit would also be enjoyed by a radio location system which utilized a RAKE type  
13 receiver since more transmitted signal energy is being effectively used by the receiver to make a time  
14 of flight measurement. Neural networks are particularly well suited to accept information from such a  
15 receiver output. The receiver would output information from several peaks and/or valleys which would  
16 include amplitude, phase information, as well as distance from Relative Time equals zero.

17 The peak and valley information associated with the leading edge of a delay spread profile may  
18 be further employed to enhance the effectiveness of the use of a mobile reference transmitter. As the  
19 Mobile Reference Transmitter grows closer to the UPX, the leading edge signature of the delay spread  
20 profile will become more and more similar to that of the UPX.

21 By providing both sets of signature information from the UPX and the MRX simultaneously to  
22 the input of a neural network, the network will be able to establish a prediction to at least advise the  
23 mobile reference team if they are growing closer to the UPX or further away. The neural network may  
24 also be able to provide enhanced accuracy differential position vectors with the added input of the peak  
25 and valley information from the leading edge of a delay spread profile.

26 Grid synchronization of the receivers utilized within a desired coverage area must be accurately  
27 and reliably provided. Any uncorrected errors due to time base drift will cause systematic errors in  
28 position fix accuracy. Figure 11 depicts a Relative Time-of-Arrival receiver utilizing a GPS receiver as  
29 a reference period. GPS satellites are outfitted with highly accurate Cesium atomic clocks as  
30 references. That reference information can be derived by a land based GPS receiver. The GPS  
31 receiver uses an internal time reference which is recalibrated by GPS satellite transmissions. The time  
32 bases free run in between occurrences of GPS satellite lock. Some of these receivers use second  
33 order correction techniques to maintain a highly stable internal reference. In addition to this time  
34 reference a GPS receiver can be outfitted with a one second tick or a periodic output pulse. This output  
35 pulse can be used for system synchronization, whereby the one second tick output of the GPS receiver  
36 becomes the reference. In this manner when a UPX signal is detected by a receiver the incoming  
37 signal may be measured against the inherent one second time reference, thus providing a relative

1 Time-of Arrival measurement. Any Inaccuracies caused by the physical location of a GPS receiver may  
2 be compensated by means of an initial correction factor or by the use of differential techniques as are  
3 well known in the art. As an alternative to a GPS reference 1101, a land based reference may be  
4 established providing it is in reasonable view of the various receiving elements in a system and that  
5 it provides an accurate and stable time base reference.

6 Figure 11 shows a counter 1100 being clocked 1104 by a GPS reference or the like 1101. The  
7 GPS reference or the like 1101 also provides a one second or a periodic reset pulse 1105, which is  
8 time synchronous to all receivers in a coverage area of interest. When the signal from the UPX 103  
9 is received and detected as a first arriving signal 1103, latch 1102 captures the instantaneous value  
10 in the counter 1100.

11 The latch contents will therefore equal the Relative Time-of-Arrival plus time base drift times  
12 the time since the one second boundary or last GPS satellite update has occurred. This approach yields  
13 a Time-of-Arrival relative to a GPS reference one second tick output. The Relative Time-of- Arrival can  
14 then be used as an input to a trained neural network that corrects for the clock drift between the signal  
15 from the UPX 103 and the time reference 1101. The neural network then outputs a timing indicator that  
16 has been compensated for clock drift or a drift corrected estimate of a location from which an Unknown  
17 Position Transmitter transmitted. The timing indicator either a modified Relative Time-of-Arrival, a time  
18 of arrival, or a time difference. When the output is a drift corrected timing indicator, the drift corrected  
19 timing indicator can be used as an input to a second network, i.e., a neural network to compute a  
20 location from which an Unknown Position Transmitter transmitted that uses Relative Times-of-Arrival  
21 as inputs.

22 Figure 12 shows a system for correcting for clock drift by using a periodic synchronization  
23 reference 1207 rather than directly calibrating a receiver's time base 1201. In this manner, the  
24 Time-of-Arrival of a signal from a UPX 103 is relative to the Time-of-Arrival of the periodic  
25 synchronization reference 1207. The time base 1201 is gated by gate 1202 as in clock input to a  
26 counter 1200. The counter will not count unless gate 1202 is enabled by start/stop 1203. When the  
27 periodic synchronization reference 1207 is received as a first arriving signal by receiver 1204, the  
28 counter 1200 is reset and the receiver 1204 applies a "start count" pulse via signal line 1205. Upon  
29 the reception of a signal from a UPX 103 by the first arriving detection means 1204, the receiver 1204  
30 applies a stop command via signal line 1206. The counter 1200, therefore, counts the number of time  
31 base 1201 clock transitions which elapse between the first arriving signal of the periodic synchronization  
32 reference 1207 and the first arriving transmission from the UPX 103. This periodic synchronization  
33 reference may be generated by a single coverage area wide transmitter or by multiple distributed  
34 transmitters which are intended for that purpose.

35 Furthermore, this technique is beneficial in that it allows the use of a less expensive time base  
36 compared to the more expensive GPS reference of Figure 11. It is further possible  
37 to equip receiving sites with associated transmitters so that receiving sites may also generate a periodic

1 synchronization reference.

2 The resulting count in the counter 1200 equals the Relative Time-of-Arrival of the UPX as  
3 compared to the periodic synchronization reference plus the time base 1201 drift times the time  
4 between receipt of the reference signal 1207 and the signal from the UPX 103. Like the Relative Time-  
5 of-Arrival of Figure 11, this Relative Time-of-Arrival can then be used as an input to a trained neural  
6 network that corrects for the clock drift between the signal from the UPX 103 and the time reference  
7 1201. The neural network then outputs either a modified Relative Time-of-Arrival that has been  
8 compensated for clock drift or an estimate of a location from which an Unknown Position Transmitter  
9 transmitted. As the receiver's clock time base is allowed to be lower cost and less accurate, and as  
10 the interval between synchronization reference transmissions lengthens, the value of subsequent  
11 second and third order drift corrections by the CPD increases.

12 Lastly, Figure 13 show that it is possible to achieve grid synchronization without the need for  
13 rapid periodic synchronization reference transmissions such as noted in 1207. This requires a modulo  
14 counter 1300 with additional counting states to hold larger modulo numbers representing greater time  
15 gaps between transmissions. It is also necessary to either have a more accurate time base 1301 or  
16 higher-order time based drift correction at the central processing device. Neural networks are well  
17 suited to this drift correction as they are able to take into account high order drift correction factors as  
18 well as take into consideration nonlinear effects on a receiver's time base 1301. The timing indicators  
19 are used as inputs to a neural network, and the neural network outputs a drift corrected timing indicator.  
20 Such drift corrections may alternately be accomplished, and the corrected values used, in any of the  
21 position determination processing methods as described herein.

22 The modulo counter 1300 counts clock pulses 1304 from time base 1301. When either a first  
23 arriving signal 1303 is detected from a UPX 103 or from a fixed reference transmitter 1308, a clock  
24 pulse is generated to latch 1302. Latch 1302 then stores the instantaneous state of modulo counter  
25 1300. The FRX 1308 may be co-located or made a portion of receivers which are distributed through  
26 coverage area of interest.

27 The latch 1302 now contains a number equal to the Relative Time-of-Arrival (since the modulo  
28 counter first started) plus a random number (which was present at the modulo counter's startup) plus  
29 a drift factor times the time offset from the last FRX reception.

30 If a beacon transmitter or a FRX is co-located with a receiver, it may embodied as beacon  
31 transmitter 1306. This beacon transmitter may further be initiated once per a predetermined number  
32 of counts via control line 1303 as driven from modulo counter 1300. This has the advantage of using  
33 the same transmission interval timer as the modulo counter 1300 which is used for Relative  
34 Time-of-Arrival information. In this manner the drift error of time base 1301 is common to both received  
35 signals and transmitted beacon signals. This information may be used by the central processing unit  
36 to further enhance drift error correction. As a further alternative, beacon transmitter 1306 may transmit  
37 the content of the modulo counter 1300 upon the receiver detecting a specially coded poll transmission.

Beacon transmitter 1306 may further transmit the reception of a transmission from another fixed reference transmitter 1308 which may be co-located with a remote receiver. In this manner, round trip measurement and other synchronizing techniques may be employed. This allows further tactics to eliminate the random number portion which is inherent in the modulo counter.

Several other drift elimination tactics can then be utilized by the central processor device.

#### FOR THE FRX:

1) If transmission interval is accurate and the drift accordingly small, then  $RTOA_2 - RTOA_1 = \text{xmit interval (of FRX)}$

2)  $FRX_{\text{mit } 1} \text{ Reading} = RTOA_1 + \text{RND \#}$

3)  $FRX_{\text{mit } 2} \text{ Reading} = RTOA_2 + \text{RND \#} + \text{Drift of Receiver} + \text{xmit interval} + \text{Drift of xmit interval}$   
Therefore:  $FRX_2 - FRX_1 = \text{Drift of Receiver} + \text{Drift of xmit interval}$

4) The drift of a less accurate transmission interval may be further eliminated by using a time Difference approach:

$$RTOA_{\text{rcv1}} = RTOA_{\text{xmit1}} + \text{Drift of Rcv}_1 + \text{Drift of xmit interval}$$

$$RTOA_{\text{rcv2}} = RTOA_{\text{xmit2}} + \text{Drift of Rcv}_2 + \text{Drift of xmit interval}$$

$$TD = RTOA_{\text{rcv1}} - RTOA_{\text{rcv2}}$$

$$\text{Therefore, } TD = RTOA_{\text{xmit1}} - RTOA_{\text{xmit2}} + (\text{Drift of RCV}_1 - \text{Drift of RCV}_2)$$

The combinational drift factor of RCV1-RCV2 will remain relatively constant over short time durations. This combinational reference transmission drift correction factor may then be applied to the same receiver pair when determining the TD of a UPX.

Further,

$$RTOA_1 = RTOA_2 - \text{xmit interval}$$

$$\text{RND \#} = FRX_{\text{xmit } 1} \text{ Reading} - RTOA_1$$

This drift factor can be used to correct for resulting position fix errors.

#### FOR THE UPX:

UPX Reading =  $RTOA + \text{RND \#} + (\text{Drift} \times \text{time since last FRX reception}) + \text{time since last FRX reception}$

Therefore,  $\text{UPX Reading} - \text{RND \# (from FRX)} - \text{time since last FRX reception} - (\text{Drift} \times \text{time since last FRX reception}) = RTOA \text{ of UPX}$

A system of simultaneous equations may also be employed to resolve drift and to establish receiver synchronization. Whereby all of the information as noted would be utilized such that the number of equations at least equals the number of unknowns.

Figure 14 shows two hyperbolic lines between two receivers corresponding to time difference paths. The time of flight system may provide either a Time-of-Arrival from a transponder or a Relative Time-of-Arrival from a transmit-only UPX. In a Relative Time-of-Arrival system, the Relative Time-

1 of-Arrival reading from receiver 2 1403 can be subtracted from the Relative Time-of-Arrival of receiver  
2 1 1402 to yield a time difference or TD. That TD may actually fall on any point of a curved line which  
3 follows a hyperbolic pattern. This curved line is called a hyperbolic line of position. In free space 1400,  
4 the line of position forms a perfect hyperbola about receiver 1 1402. In an actual installation subject  
5 to multi-path reflections, time difference measurements at any individual point along this hyperbolic  
6 curve will be subjected to added path of travel. All of the processor techniques described herein  
7 effectively create a corrected line of position 1401 whereby previous actuarial/historic information is  
8 used to derive a correction factor which is applied to readings during the normal operation of the  
9 system. This further requires that the error term is computationally resolved to a single receiver. If the  
10 error term is reduced to a receiver pair, then the correction factor will appear as 1404.

11 As an alternative to the processor techniques as taught herein, any equivalent lockup table or  
12 associative memory means may be employed to read a currently measured TD and use that to  
13 establish the corrected line of position 1401. The data from the corrected line of position can then be  
14 used by position calculation algorithms as are known in the art.



## CLAIMS

What is Claimed is:

1. A method for determining a location from which an unknown position radio signal is transmitted, comprising the steps of:
  - transmitting from first and second known locations respective first and second radio signals;
  - receiving said first radio signal at plural receivers located at different known locations;
  - receiving said second radio signal at plural receivers located at different known locations;
  - determining a reference time of reception when each radio signal transmitted from said first and second known locations is received by the plural receivers;
  - communicating to a central processing device (CPD) the first and second radio signals received by plural receivers and the respective times of reception when the first and second signals were received by the plural receivers;
  - training a network in the CPD using the received first and second radio signals and using the known locations from which the received first and second radio signals were transmitted in relation to the respective reference times of reception at the plural receivers of the received first and second radio signals;
  - receiving at plural receivers an unknown position radio signal from an unknown location;
  - communicating to the CPD the radio signals received by reception of the unknown position radio signal at the plural receivers;
  - using the communicated unknown position radio signals at the plural receivers in relation to the respective reference times of reception of the unknown position radio signals as inputs to the trained network in the CPD; and
  - outputting from the CPD an estimate of the actual location from which the unknown position radio signal was transmitted.
2. The method of Claim 1, wherein said step of training comprises the step of:  
training a neural network.
3. The method of Claim 1, wherein said step of training comprises the step of:  
training an associative memory.
4. The method of Claim 1, wherein said step of training comprises the steps of:  
computing a set of correction factors; and  
storing said correction factors in memory.
5. The method of Claim 1, wherein the step of determining a time of reception comprises the step of:  
determining an absolute time of arrival.
6. The method of Claim 1, wherein the step of determining a time of reception comprises the step of:  
determining a relative time of arrival.

- 1 7. The method of Claim 1, wherein the step of determining a time of reception comprises the steps  
2 o f  
3 calculating an original convergence error using said reference times of reception;  
4 reducing one of said reference times;  
5 recalculating said convergence error; and  
6 using said reduced reference time as an input to the trained network in the CPD if the  
7 recalculated convergence error is smaller than the original convergence error.
- 8 8. The method of Claim 1, further comprising the step of:  
9 transmitting from plural subsequent known locations respective plural subsequent radio  
10 signals;  
11 receiving plural subsequent radio signals at plural receivers;  
12 determining a reference time of reception when each of said plural subsequent radio signals  
13 is received by the respective plural receivers which received each respective subsequent radio  
14 signal;  
15 communicating to said CPD said plural subsequent radio signals and the respective times of  
16 reception when each of the plural subsequent signals were received by the respective plural  
17 receivers; and  
18 storing information about n radio signals, n known locations and the times of arrival of the n  
19 radio signals; and  
20 training the network in the CPD using the stored n radio signals, the n known locations from  
21 which the received n radio signals were transmitted in relation to the n respective times of reception  
22 at the plural receivers.
- 23 9. The method of Claim 1, further comprising the step of:  
24 transmitting from plural subsequent known locations respective plural unknown position  
25 radio signals;  
26 receiving plural subsequent unknown position radio signals at plural receivers;  
27 determining a reference time of reception when each of said plural subsequent radio signals  
28 is received by the respective plural receivers which received each respective subsequent unknown  
29 radio signal;  
30 communicating to said CPD said plural subsequent unknown position radio signals and the  
31 respective times of reception when each of the plural subsequent signals were received by the  
32 respective plural receivers;  
33 computing, using the CPD, plural estimates of the actual location of the unknown position  
34 radio transmitter;  
35 storing, at the CPD, a most recent m estimates; and  
36 enhancing subsequent estimates of the actual location of the unknown position radio  
37 transmitter using the stored most recent m estimates.

- 1 10. The method of Claim 9, further comprising the step of:  
2 averaging the reference times of reception to compensate for motion.
- 3 11. The method of Claim 9, further comprising the step of:  
4 predicting a velocity.
- 5 12. The method of Claim 9, further comprising the step of:  
6 predicating a rate of change of velocity.
- 7 13. The method of Claim 9, further comprising the step of:  
8 predicating a rate of change of velocity
- 9 14. The method of Claim 10, wherein the step of training comprises the step of:  
10 training a neural network.
- 11 15. The method of Claim 11, wherein the step of training comprises the step of:  
12 training a neural network.
- 13 16. The method of Claim 12, wherein the step of training comprises the step of:  
14 training a neural network.
- 15 17. The method of Claim 13, wherein the step of training comprises the step of:  
16 training a neural network.
- 17 18. The method of Claim 1, further comprising the steps of:  
18 transmitting from a known mobile location a mobile radio signal;  
19 receiving said mobile radio signal at plural receivers located at different known locations;  
20 determining a time of reception when the mobile radio signal transmitted from the known  
21 mobile location is received by the plural receivers;  
22 communicating to the CPD the mobile radio signal received by the plural receivers and the  
23 respective times of reception when the mobile radio signal was received by the plural receivers;  
24 using the communicated mobile radio signal and the respective time of reception of the  
25 mobile radio signal as inputs to the trained network in the CPD; and  
26 using the known mobile location as an input to the trained network in the CPD.
- 27 19. The method of Claim 1, further comprising the steps of:  
28 transmitting from a known fixed location a fixed radio signal;  
29 receiving said fixed radio signal at plural receivers located at different known locations;  
30 determining a time of reception when the fixed radio signal transmitted from the known fixed  
31 location is received by the plural receivers;  
32 communicating to the CPD the fixed radio signal received by the plural receivers and the  
33 respective times of reception when the fixed radio signal was received by the plural receivers;  
34 using the communicated fixed radio signal and the respective time of reception of the fixed  
35 radio signal as inputs to the trained network in the CPD.
- 36 20. The method of Claim 19, further comprising the step of:  
37 using the known fixed location as an input to the network in the CPD.

1 21. The method of Claim 1, wherein the step of using the communicated unknown position radio  
2 signals as inputs comprises the steps of:

3 determining one of said plural receivers which received said unknown position radio signal  
4 which has communicated an artificially delayed reference time; and  
5 disregarding the artificially delayed reference time as an input to the trained network in the  
6 CPD.

7 22. The method of Claim 21, wherein the step of using the communicated unknown position radio  
8 signals as inputs comprises the steps of:

9 receiving a subsequent unknown position radio signal at plural receivers;  
10 determining a reference time of reception of said subsequent unknown radio signal at the  
11 plural receivers;  
12 communicating to the CPD the subsequent unknown position radio signals received by the  
13 plural receivers and the respective reference times of reception of subsequent the unknown position  
14 radio signal at the plural receivers; and

15 using the communicated subsequent unknown position radio signals at the plural receivers  
16 in relation to the respective reference times of reception of the subsequent unknown position radio  
17 signals as inputs to the trained network in the CPD.

18 23. The method of Claim 1, wherein the step of using the communicated unknown position radio  
19 signals as inputs comprises the steps of:

20 determining one of said plural receivers which received said unknown position radio signal which  
21 has communicated an artificially delayed reference time; and  
22 retraining said network in said CPD to lower an effect of the unknown position radio signal  
23 from said one of plural receivers which has communicated an artificially delayed reference time.

24 24. The method of Claim 1, further comprising the step of:

25 using time-of-day information as an input to said trained network to correct for TOA/RTOA  
26 measurement drift.

27 25. The method of Claim 1, further comprising the step of:

28 using time-of-season information as an input to said trained network to correct for  
29 TOA/RTOA measurement drift.

30 26. The method of Claim 1, further comprising the steps of:

31 using plural directional antennas on one of said plural radio receivers to determine plural  
32 sectors from which said first and second radio signals came;

33 communicating to said CPD said plural sectors of said first and second radio signals;  
34 training said network in said CPD using said plural sectors of said first and second radio  
35 signals and said first and second locations;

36 receiving one of plural sectors from which said unknown position radio signal came;

37 communicating to the CPD said one of plural sectors of said unknown position radio signal;

1 and

2 using said one of plural sectors of said unknown position radio signal as an input to the  
3 network in the CPD.

4 27. The method of Claim 1, wherein the step of training comprises:

5 determining a correction factor that corrects an estimate of the actual location from which  
6 the unknown signal was transmitted; and

7 storing said correction factor.

8 28. The method of Claim 27, wherein said estimating step comprises the step of:

9 using the stored correction factor to correct the actual location from which the unknown  
10 signal was transmitted.

11 29. The method of Claim 28, wherein said storing step comprises the step of:

12 storing said correction factor in a matrix of correction factors indexed by latitude and  
13 longitude.

14 30. The method of Claim 28, wherein said storing step comprises the step of:

15 storing said correction factor in a table of correction factors with corresponding position  
16 information.

17 31. A digital storage medium comprising an executable computer program to perform the  
18 method of Claim 1.

19 32. A method for determining a location of an unknown position radio transmitter under low  
20 signal-to-noise ratio conditions, comprising the steps of:

21 receiving a first radio signal, including a unit identification, a first transmission time from an  
22 unknown position radio transmitter at a first of  $n$  radio receivers, where  $n > 2$ ;

23 determining, at said first radio receiver or at a central processing device (CPD), a time of a  
24 next unknown position radio transmission;

25 sending the time of the next radio transmission from the first radio receiver to the other  $n-1$   
26 radio receivers or sending the time of the next radio transmission from the CPD to the  $n$  radio  
27 receivers;

28 receiving, with a signal enhancing node, radio signals from said unknown position radio  
29 transmitter at the  $n$  radio receivers at the time of the next unknown position radio transmission; and

30 determining a location of said unknown position radio transmitter using said enhanced radio  
31 signals.

32 33. The method of Claim 32, wherein said step of determining comprises:

33 determining the location of said unknown position radio transmission using a neural  
34 network.

35 34. The method of Claim 32, wherein said step of determining comprises:

36 determining the location of said unknown position radio transmission using an associative  
37 memory.

1 35. The method of Claim 32, wherein said step of determining comprises:

2 determining the time of the next unknown position radio transmission by reading an  
3 indication of the time of the next unknown position radio transmission from data contained in the  
4 first radio signal.

5 36. The method of Claim 32, wherein said step of determining comprises:

6 receiving a second radio signal at a second transmission time at a second one of said n  
7 radio receivers; and

8 determining the time of the next unknown position radio transmission by using the first and  
9 second transmission times.

10 37. A digital storage medium comprising an executable computer program to perform the method  
11 of Claim 32.

12 38. A method, tolerant of fixed obstacles, for determining a location from which an unknown  
13 position radio signal is transmitted, comprising the steps of:

14 a) transmitting an unknown position radio signal from an unknown location;  
15 b) receiving said unknown position radio signal at plural radio receivers at different known  
16 locations;

17 c) determining reference times of reception when said unknown position radio signal is  
18 received by plural receivers;

19 d) communicating to a central processing device (CPD) said reference times and said  
20 unknown position radio signal;

21 e) designating a first of said plural radio receivers as a current receiver;

22 f) estimating an initial unknown location estimate, having a convergence error, of said  
23 unknown location;

24 g) ending the estimation process if said convergence is less than a specified threshold;

25 h) reducing the time value corresponding to the current receiver to a smaller time value;

26 i) determining a new unknown location estimate, having a new convergence error;

27 j) setting the convergence error equal to the new convergence error and repeating steps g-i  
28 if the new convergence error is smaller than the previous convergence error;

29 k) resetting the smaller time value to the time value of step g if the new convergence  
30 error of step i was larger than the convergence error of step g; and

31 l) repeating steps g-k for each of said plural radio receivers that have not been  
32 designated as the current receiver.

33 39. A method, tolerant of fixed obstacles, for determining a location from which an unknown  
34 position radio signal is transmitted, comprising the steps of:

35 transmitting from first and second known locations respective first and second radio signals;

36 receiving said first radio signal at plural receivers located at different known locations;

37 receiving said second radio signal at plural receivers located at different known locations;

1 determining a reference time of reception when each radio signal transmitted from said first  
2 and second known locations is received by the respective plural receivers;

3 communicating to a central processing device (CPD) the first and second radio signals  
4 received by the respective plural receivers and the respective times of reception when the first and  
5 second signals were received by the respective plural receivers;

6 training a network in the CPD using the received first and second radio signals and the  
7 known locations from which the received first and second radio signals were transmitted in relation  
8 to the respective reference times of reception at the plural receivers of the received first and second  
9 radio signals, wherein a correction factor is obtained after each training iteration, said training factor  
10 correcting for differences between said known locations and locations estimated by said network;

11 storing the correction factors;

12 receiving at plural receivers an unknown position radio signal from an unknown location;

13 communicating to the CPD the radio signals received by the plural receivers and the  
14 respective reference times of reception of the unknown position radio signal at the plural radio  
15 receivers;

16 using the communicated unknown position radio signals at said plural receivers in relation  
17 to the respective reference times of reception of the unknown position radio signals as inputs to the  
18 trained network in the CPD;

19 outputting from the CPD an initial estimate of the actual location from which the unknown  
20 position radio signal was transmitted; and

21 correcting said initial estimate using one of said stored correction factors.

22 40. The method of Claim 39, wherein the step of training comprises the step of:

23 training a neural network.

24 41. The method of Claim 39, wherein the step of training comprises the step of:

25 training an associative memory.

26 42. A method for determining a location inside a building from which an unknown position radio  
27 signal is transmitted, comprising the steps of:

28 transmitting from plural known indoor locations respective indoor radio signals;

29 receiving said indoor radio signals at plural receivers located at different known locations,  
30 said indoor radio signals having at least one of leading edge peak and leading edge valley delay  
31 spread profile cues;

32 determining plural reference times of reception when each indoor radio signal transmitted  
33 from said known indoor locations is received by the plural receivers which received each respective  
34 radio signal;

35 communicating to a central processing device (CPD) the indoor radio signals received by  
36 the plural receivers and the plural respective times of reception when each of the indoor radio  
37 signals were received by the respective plural receivers;

1 training a network in the CPD using the received indoor radio signals and the known  
2 locations from which each of the received indoor radio signals were transmitted in relation to the  
3 respective plural reference times of reception at the respective plural receivers of the received  
4 indoor radio signals;

5 receiving at plural receivers an unknown position radio signal from an unknown location;  
6 communicating to the CPD the radio signals received by the plural receivers receiving the  
7 unknown position radio signal and the respective reference times of reception of the unknown  
8 position radio signal at the respective plural receivers;

9 using the communicated unknown position radio signals in relation to the respective  
10 reference times of reception of the unknown position radio signals as inputs to the trained  
11 network in the CPD; and

12 outputting from the CPD an estimate of the actual location from which the unknown position  
13 radio signal was transmitted.

14 43. The method of Claim 42, further comprising the steps of:

15 transmitting from a known retraining location a retraining radio signal;

16 receiving said retraining radio signal at plural receivers located at different known locations,  
17 said retraining radio signal having leading edge peak and valley delay spread profile cues;

18 determining a reference time of reception when the retraining radio signal transmitted from  
19 the known retraining location is received by the plural receivers which received each respective  
20 radio signal;

21 communicating to a central processing device (CPD) the retraining radio signals received by  
22 the plural receivers and the respective times of reception when each of the retraining radio signals  
23 were received by the respective plural receivers; and

24 retraining a network in the CPD using the received retraining radio signals and the known  
25 locations from which each of the received retraining radio signals were transmitted in relation to the  
26 respective reference times of reception at the respective plural receivers of the received retraining  
27 radio signals.

28 44. The method of Claim 43, wherein said step of training comprises the step of:  
29 training a neural network.

30 45. The method of Claim 43, wherein said step of training comprises the step of:  
31 training an associative memory.

32 46. The method of Claim 43, wherein the step of transmitting from a known retraining location  
33 comprises the step of:

34 initiating the transmission at a user's request.

35 47. The method of Claim 46, further comprising the step of:

36 transmitting the known retraining location by telephone.

37 48. The method of Claim 43, wherein the step of transmitting from a known retraining location



1 comprises the steps of:

2 receiving a retraining request from the CPD; and

3 initiating the transmission after having received the retraining request.

4 49. The method of Claim 41, wherein the step of receiving said retraining radio signal further  
5 comprises the step of:

6 receiving said retraining radio signal at the respective plural receivers, said retraining radio  
7 signal having multiple peaks and valleys as delay spread profile cues.

8 50. The method of Claim 42, further comprising the steps of:

9 determining signal-to-noise ratios at the respective plural receivers which received each  
10 respective indoor radio signal;

11 communicating the indoor signal-to-noise ratios to said CPD;

12 training the network in the CPD using said signal-to-noise ratios;

13 determining signal-to-noise ratios at the respective plural receivers which received each  
14 respective unknown position radio signal;

15 communicating the unknown position signal-to-noise ratios to said CPD; and

16 using the communicated unknown position signal-to-noise ratios as inputs to the trained  
17 network in the CPD,

18 51. The method of Claim 42, wherein the step of receiving said indoor radio signals comprises the  
19 step of:

20 receiving said indoor radio signals at said plural receivers, said plural receivers being at  
21 varying altitudes.

22 52. A method for determining a location from which an unknown position radio signal is transmitted,  
23 comprising the steps of:

24 transmitting from plural known mobile locations respective mobile radio signals;

25 receiving said mobile radio signals at plural receivers located at different known locations,  
26 said mobile radio signals having at least one of leading edge peak and leading edge valley delay  
27 spread profile cues;

28 determining a reference time of reception when each mobile radio signal transmitted from  
29 said mobile known locations is received by the plural receivers which received each respective  
30 indoor signal;

31 communicating to a central processing device (CPD) information relating to the mobile radio  
32 signals received by the plural receivers, including the respective reference times of reception when  
33 each of the mobile radio signals were received by the respective plural receivers;

34 receiving at plural receivers an unknown position radio signal from an unknown location;

35 communicating to the CPD information relating to the unknown position radio signals  
36 received by the plural receivers receiving the unknown position radio signal, including the respective  
37 reference times of reception of the unknown position radio signal at the respective plural receivers;

1 transmitting from subsequent plural known mobile locations respective subsequent mobile  
2 radio signals;

3 receiving said subsequent mobile radio signals at plural receivers located at different known  
4 locations, said subsequent mobile radio signals having at least one of leading edge peak and  
5 leading edge valley delay spread profile cues;

6 determining a reference time of reception when each subsequent mobile radio signal  
7 transmitted from said subsequent mobile known locations is received by the plural receivers which  
8 received each respective subsequent mobile radio signal;

9 communicating to the CPD information relating to the subsequent mobile radio signals  
10 received by the plural receivers receiving the subsequent mobile radio signal, including the  
11 respective reference times of reception when each of the subsequent mobile radio signals were  
12 received by the plural receivers;

13 using the communicated unknown position radio signals in relation to the respective  
14 reference times of reception of the unknown position radio signals and the subsequent mobile radio  
15 signals in relation to the respective reference times of reception of the unknown position radio  
16 signals and the subsequent mobile radio signals in relation to the respective reference times of  
17 reception of the subsequent mobile position radio signals as inputs to the CPD; and

18 outputting from the CPD an estimate of the actual location from which the unknown position  
19 radio signal was transmitted.

20 53. The method of Claim 52, further comprising the steps of:

21 training the CPD using the received mobile radio signals and the known locations from  
22 which each of the received mobile radio signals were transmitted in relation to the respective  
23 reference times of reception at the plural receivers of the received mobile radio signals, wherein the  
24 CPD comprises a neural network.

25 54. A method for correcting a receiver's time base clock drift via a time reference signal  
26 transmission and a central processing device CPD, in order to determine with increased accuracy, a  
27 location from which an unknown position radio signal is transmitted, comprising the steps of:

28 transmitting a time reference signal;

29 receiving said time reference signal at first and second radio receivers;

30 resetting first and second counters at said first and second receivers at predetermined  
31 intervals based on said time reference signal, each of said counters containing a value and  
32 receiving a clocking signal;

33 correcting a time base at said first and second radio receivers using the received time  
34 reference signal;

35 incrementing each of said counters using the respective time base of the respective radio  
36 receiver as a clocking signal;

37 receiving an unknown position radio signal at said first and second receivers;

1 capturing the respective values of the counters when said unknown position radio signals  
2 are received;

3 communicating the captured values to a neural network;

4 using the captured values as a timing indicator between the respective time reference  
5 signals and the unknown position radio signal;

6 inputting the timing indicator to the neural network; and

7 outputting from the neural network a drift corrected timing indicator and based upon past  
8 training of the neural network.

9 55. The method of Claim 54, further comprising the steps of:

10 transmitting from a first known location a first radio signal;

11 receiving said first radio signal at a radio receiver located at a known location;

12 determining a timing indicator of said first radio signal;

13 communicating the timing indicator of said first radio signal to said neural network; and

14 training the network using the timing indicator of said first radio signal.

15 56. The method of Claim 54, wherein the step of transmitting a time reference comprises the step  
16 of:

17 transmitting a global positioning system reference.

18 57. The method of Claim 54, wherein the step of transmitting a time reference comprises the step  
19 of:

20 transmitting a time reference from a grid synchronizing transmitter.

21 58. The method of Claim 54, further comprising the steps of:

22 using said drift corrected timing indicator as an input to a second neural network; and

23 outputting from said second neural network an estimate of the actual location from which  
24 the unknown position radio signal was transmitted.

25 59. A method for correcting a receiver's time base clock drift via a time reference signal  
26 transmission and a central processing device (CPD), in order to determine with increased  
27 accuracy, a location from which an unknown position radio signal is transmitted, comprising the  
28 steps of:

29 transmitting a time reference signal;

30 receiving said time reference signal at first and second radio receivers;

31 resetting first and second counters at said first and second receivers at predetermined  
32 intervals based on said time reference signal, each of said counters containing a value and  
33 receiving a clocking signal;

34 correcting a time base at said first and second radio receivers using the received time  
35 reference signal;

36 incrementing each of said counters using the respective time base of the respective radio  
37 receiver as a clocking signal;

1 receiving an unknown position radio signal at said first and second receivers;  
2 capturing the respective values of the counters when said unknown position radio signals  
3 are received;  
4 communicating the captured values to a neural network;  
5 using the captured values as a timing indicator between the respective time reference  
6 signals and the unknown position radio signal;  
7 inputting the timing indicator to the neural network; and  
8 outputting from the neural network an estimate of the actual location from which the  
9 unknown position radio signal was transmitted.

10 60. The method of Claim 59, further comprising the steps of:

11 transmitting from a first known location a first radio signal;  
12 receiving said first radio signal at a radio receiver located at a known location;  
13 determining a timing indicator of said first radio signal;  
14 communicating the timing indicator of said first radio signal to said neural network; and  
15 training the network using the timing indicator of said first radio signal.

16 61. The method of Claim 59, wherein the step of transmitting a time reference comprises the step  
17 of:

18 transmitting a global positioning system reference.

19 62. The method of Claim 59, wherein the step of transmitting a time reference comprises the step  
20 of:

21 transmitting a time reference from a grid synchronizing transmitter.

22 63. A method for correcting a receiver's time base clock drift via a time reference signal  
23 transmission and a central processing device (CPD), in order to determine with increased accuracy,  
24 a location from which an unknown position radio signal is transmitted, comprising the steps of:

25 transmitting a periodic synchronization reference signal;  
26 receiving said periodic synchronization reference signal at a radio receiver;  
27 enabling a counter when said periodic synchronization reference is received, said counter  
28 having a value and receiving a clock signal;

29 clocking said counter using a local time base clock;  
30 receiving an unknown position radio signal;  
31 disabling said counter when said unknown position radio signal is received;  
32 capturing the value of the counter when said unknown position radio signal is received;  
33 communicating the captured value to a neural network;  
34 using the captured value as a timing indicator between the time reference signal and the  
35 unknown position radio signal;  
36 inputting the timing indicator to the neural network; and outputting from the neural network a  
37 drift corrected timing indicator based on the timing indicator and based upon past training of the

1 neural network.

2 64. The method of Claim 63, further comprising the steps of:

3 transmitting from a first known location a first radio signal;  
4 receiving said first radio signal at a radio receiver located at a known location;  
5 determining a timing indicator of said first radio signal;  
6 communicating the timing indicator of said first radio signal to said neural network; and  
7 training the network using the timing indicator of said first radio signal.

8 65. The method of Claim 63, wherein the step of

9 transmitting a periodic synchronization reference signal comprises the step of:  
10 transmitting a periodic synchronization reference signal from a fixed reference transmitter.

11 66. The method of Claim 63, further comprising the steps of:

12 using said modified timing indicator as an input to a second neural network; and  
13 outputting from said second neural network an estimate of the actual location from which  
14 the unknown position radio signal was transmitted.

15 67. A method for correcting a receiver's time base clock drift via a time reference signal  
16 transmission and a central processing device (CPD), in order to determine with increased accuracy,  
17 a location from which an unknown position radio signal is transmitted, comprising the steps of:

18 transmitting a periodic synchronization reference signal;  
19 receiving said periodic synchronization reference signal at a radio receiver;  
20 enabling a counter when said periodic synchronization reference is received, said counter  
21 having a value and receiving a clock signal;  
22 clocking said counter using a local time base clock;  
23 receiving an unknown position radio signal;  
24 disabling said counter when said unknown position radio signal is received;  
25 capturing the value of the counter when said unknown position radio signal is received;  
26 communicating the captured value to a neural network;  
27 using the captured value as a timing indicator between the time reference signal and the  
28 unknown position radio signal;

29 inputting the timing indicator to the neural network; and  
30 outputting from the neural network an estimate of the actual location from which the  
31 unknown position radio signal was transmitted.

32 68. The method of Claim 67, further comprising the steps of:

33 transmitting from a first known location a first radio signal;  
34 receiving said first radio signal at a radio receiver located at a known location;  
35 determining a timing indicator of said first radio signal;  
36 communicating the timing indicator of said first radio signal to said neural network; and  
37 training the network using the timing indicator of said first radio signal.

1 69. The method of Claim 67, wherein the step of:

2 transmitting a periodic synchronization reference signal comprises the step of:

3 transmitting a periodic synchronization reference signal from a fixed reference transmitter.

4 70. A method for correcting a receiver's time base clock drift via a time reference signal  
5 transmission and a central processing device (CPD), in order to determine with increased accuracy,  
6 a location from which an unknown position radio signal is transmitted, comprising the steps of:

7 clocking a counter using a local clock, said counter having a value and receiving said local  
8 clock signal;

9 transmitting a fixed reference signal;

10 receiving said fixed reference signal at a radio receiver;

11 capturing the value of the counter when said fixed reference signal is received;

12 using the captured value as a first timing indicator;

13 receiving an unknown position radio signal;

14 capturing the value of the counter when said unknown position radio signal is received;

15 using the captured value as a second timing indicator;

16 communicating the first and second timing indicators to a neural network;

17 using the captured first and second timing indicators as inputs to said neural network; and

18 outputting from the neural network a drift corrected timing indicator based on the first and  
19 second timing indicators and based upon past training of the neural network.

20 71. The method of Claim 70, further comprising the steps of:

21 transmitting from a first known location a first radio signal;

22 receiving said first radio signal at a radio receiver located at a known location;

23 determining a timing indicator of said first radio signal;

24 communicating the timing indicator of said first radio signal to said neural network; and

25 training the network using the timing indicator of said first radio signal.

26 72. The method of Claim 70, further comprising the steps of:

27 using said drift corrected timing indicator as an input to a second neural network; and

28 outputting from said second neural network an estimate of the actual location from which  
29 the unknown position radio signal was transmitted.

30 73. A method for correcting a receiver's time base clock drift via a time reference signal  
31 transmission and a central processing device (CPD), in order to determine with increased accuracy,  
32 a location from which an unknown position radio signal is transmitted, comprising the steps of:

33 clocking a counter using a local clock, said counter having a value and receiving said local  
34 clock signal;

35 transmitting a fixed reference signal;

36 receiving said fixed reference signal at a radio receiver;

37 capturing the value of the counter when said fixed reference signal is received;

1 using the captured value as a first timing indicator;  
2 receiving an unknown position radio signal;  
3 capturing the value of the counter when said unknown position radio signal is received;  
4 using the captured value as a second timing indicator;  
5 communicating the first and second timing indicators to a neural network;  
6 using the captured first and second timing indicators as inputs to said neural; and  
7 outputting from the neural network an estimate of the actual location from which the  
8 unknown position radio signal was transmitted.

9 74. The method of Claim 73, further comprising the steps of:

10 transmitting from a first known location a first radio signal;  
11 receiving said first radio signal at a radio receiver located at a known location;  
12 determining a timing indicator of said first radio signal;  
13 communicating the timing indicator of said first radio signal to said neural network; and  
14 training the network using the timing indicator of said first radio signal.

15 75. The claims according to Claims 54, 63 and 70 wherein:

16 the step of using the captured values comprises using the captured values as relative times  
17 of arrival; and

18 the step of outputting comprises outputting a relative time of arrival.

19 76. The claims according to Claims 59, 67 and 73 wherein the step of using the captured values  
20 comprises:

21 using the captured values as relative times of arrival.

22 77. The claims according to Claims 54, 63, and 70 wherein:

23 the step of using the captured values comprises using the captured values as times of  
24 arrival; and

25 the step of outputting comprises outputting a time of arrival.

26 78. The claims according to Claims 59, 67 and 73 wherein the step of using the captured values  
27 comprises:

28 using the captured values as times of arrival.

29 79. The claims according to Claims 54, 63 and 70 wherein:

30 the step of using the captured values comprises subtracting pairs of the captured values to  
31 generated time differences; and

32 the step of outputting comprises outputting a time difference.

33 80. The claims according to Claims 59, 67 and 73 wherein the step of using the captured values  
34 comprises:

35 subtracting pairs of the captured values to generate time differences.

36 81. A method for training a neural network, comprising the steps of:

37 transmitting from plural known mobile locations respective mobile radio signals;

1 receiving said mobile radio signals at plural receivers located at different known locations,  
2 said mobile radio signals having at least one of leading edge peak and leading edge valley delay  
3 spread profile cues;

4 determining a reference time of reception for respective mobile radio signals from said at  
5 least one of said leading edge peak and said leading edge valley delay spread profile cues when  
6 each mobile radio signal transmitted from said mobile known locations is received by respective  
7 plural receivers;

8 communicating to a neural network the mobile radio signals received by the plural receivers  
9 and the plural respective times of reception when each of the mobile radio signals were received by  
10 the plural receivers; and

11 training the neural network using the received mobile radio signals and the known locations  
12 from which each of the received mobile radio signals were transmitted in relation to the plural  
13 respective reference times of reception at the plural receivers of the received mobile radio signals.

14 82. A method for enhancing an estimate of a location from an unknown transmitter  
15 transmitted by using a neural network, comprising the steps of:

16 receiving at plural receivers an unknown position radio signal from an unknown location,  
17 said unknown position radio signal having at least one of leading edge peak and leading edge  
18 valley delay spread profile cues;

19 determining a reference time of reception for said unknown position radio signal from said  
20 at least one of said leading edge peak and said leading edge valley delay spread profile cues when  
21 said unknown position radio signal transmitted from said unknown location is received by said plural  
22 receivers;

23 communicating to a trained neural network the radio signals having said at least one of  
24 leading edge peak and leading edge valley delay spread profile cues received by the plural  
25 receivers and the respective reference times of reception of the unknown position radio signal at the  
26 plural receivers;

27 using the communicated radio signals and the respective reference times of reception of the  
28 unknown position radio signal as inputs to the trained neural network; and

29 outputting from the trained neural network an estimate of an actual location from which the  
30 unknown position radio signal was transmitted.

31 83. A method for enhancing an estimate of a location from an unknown transmitter transmitted by  
32 using a neural network, comprising the steps of:

33 transmitting from plural known mobile locations respective mobile radio signals;

34 receiving said mobile radio signals at plural receivers located at different known locations,  
35 said mobile radio signals having at least one of leading edge peak and leading edge valley delay  
36 spread profile cues;

37 determining a reference time of reception when each mobile radio signal transmitted from



1 said mobile known locations is received by the plural receivers;

2 communicating to a neural network the mobile radio signals having said at least one of  
3 leading edge peak and leading edge valley delay spread profile cues received by the plural  
4 receivers and the respective times of reception when each of the mobile radio signals were received  
5 by the plural receivers;

6 receiving at plural receivers an unknown position radio signal from an unknown location,  
7 said unknown position radio signal having at least one of leading edge peak and leading edge  
8 valley delay spread profile cues;

9 determining a reference time of reception for said unknown position radio signal from said  
10 at least one of said leading edge peak and said leading edge valley delay spread profile cues when  
11 said unknown position radio signal transmitted from said unknown locations is received by said  
12 plural receivers;

13 communicating to the trained neural network the radio signals having said at least one of  
14 leading edge peak and leading edge valley delay spread profile cues received by the plural  
15 receivers and the respective reference times of reception of the unknown position radio signal at the  
16 plural receivers;

17 using the mobile radio signals in relation to the respective reference times of reception of  
18 the mobile position radio signals and the unknown radio signals in relation to the respective  
19 reference times of reception of the unknown position radio signals as inputs to the trained neural  
20 network; and

21 outputting from the neural network an estimate of an actual location from which the  
22 unknown position radio signal was transmitted.

23 84. A system for determining a location from which an unknown position radio signal is transmitted,  
24 comprising:

25 means for transmitting from first and second known locations respective first and second  
26 radio signals;

27 means for receiving said first radio signal at plural receivers located at different known  
28 locations;

29 means for receiving said second radio signal at plural receivers located at different known  
30 locations;

31 means for determining a reference time of reception when each radio signal transmitted  
32 from said first and second known locations is received by the plural receivers;

33 means for communicating to a central processing device (CPD) the first and second radio  
34 signals received by plural receivers and the respective times of reception when the first and second  
35 signals were received by the plural receivers;

36 means for training a network in the CPD using the received first and second radio signals  
37 and using the known locations from which the received first and second radio signals were

1 transmitted in relation to the respective reference times of reception at the plural receivers of the  
2 received first and second radio signals;

3 means for receiving at plural receivers an unknown position radio signal from an unknown  
4 location;

5 means for communicating to the CPD the radio signals received by the plural receivers and  
6 the respective reference times of reception of the unknown position radio signal at the plural  
7 receivers;

8 means for using the communicated unknown position radio signals at the plural receivers in  
9 relation to the respective reference times of reception of the unknown position radio signals as  
10 inputs to the trained network in the CPD; and

11 means for outputting from the CPD an estimate of the actual location from which the  
12 unknown position radio signal was transmitted.

13 85. A system for determining a location from which an unknown position radio signal is transmitted,  
14 comprising:

15 means for transmitting from plural known mobile locations respective mobile radio signals;

16 means for receiving said mobile radio signals at plural receivers located at different known  
17 locations, said mobile radio signals having at least one of leading edge peak and leading edge  
18 valley delay spread profile cues;

19 means for determining a reference time of reception when each mobile radio signal  
20 transmitted from said mobile known locations is received by the plural receivers which received  
21 each respective indoor signal;

22 means for communicating to a central processing device (CPD) information relating to the  
23 mobile radio signals received by the plural receivers, including the respective reference times of  
24 reception when each of the mobile radio signals were received by the respective plural receivers;

25 means for receiving at plural receivers an unknown position radio signal from an unknown  
26 location;

27 means for communicating to the CPD information relating to the unknown position radio  
28 signals received by the plural receivers receiving the unknown position radio signal, including the  
29 respective reference times of reception of the unknown position radio signal at the respective plural  
30 receivers;

31 means for transmitting from subsequent plural known mobile locations respective  
32 subsequent mobile radio signals;

33 means for receiving said subsequent mobile radio signals at plural receivers located at  
34 different known locations, said subsequent mobile radio signals having at least one of leading edge  
35 peak and leading edge valley delay spread profile cues;

36 means for determining a reference time of reception when each subsequent mobile radio  
37 signal transmitted from said subsequent mobile known locations is received by the plural receivers

1 which received each respective subsequent mobile radio signal;

2 means for communicating to the CPD information relating to the subsequent mobile radio  
3 signals received by the plural receivers receiving the subsequent mobile radio signal, including the  
4 respective reference times of reception when each of the subsequent mobile radio signals were  
5 received by the plural receivers;

6 means for using the communicated unknown position radio signals in relation to the  
7 respective reference times of reception of the unknown position radio signals and the  
8 subsequent mobile position radio signals in relation to the respective reference times of reception of  
9 the subsequent mobile position radio signals as inputs to the CPD; and

10 means for outputting from the CPD an estimate of the actual location from which the  
11 unknown position radio signal was transmitted.

12 86. A system for correcting a receiver's time base clock drift via a time reference signal  
13 transmission and a central processing device (CPD), in order to determine with increased accuracy,  
14 a location from which an unknown position radio signal is transmitted, comprising:

15 means for transmitting a time reference signal;

16 means for receiving said time reference signal at first and second radio receivers;

17 means for resetting first and second counters at said first and second receivers at  
18 predetermined intervals based on said time reference signal, each of said counters containing a  
19 value and receiving a clocking signal;

20 means for correcting a time base at said first and second radio receivers using the received  
21 time reference signal;

22 means for incrementing each of said counters using the respective time base of the  
23 respective radio receiver as a clocking signal;

24 means for receiving an unknown position radio signal at said first and second receivers;

25 means for capturing the respective values of the counters when said unknown position radio  
26 signals are received;

27 means for communicating the captured values to a neural network;

28 means for using the captured values as a timing indicator between the respective time  
29 reference signals and the unknown position radio signal;

30 means for inputting the timing indicator to the neural network; and

31 means for outputting from the neural network an estimate of the actual location from which  
32 the unknown position radio signal was transmitted.

33 87. A system for correcting a receiver's time base clock drift via a time reference signal  
34 transmission and a central processing device (CPD), in order to determine with increased accuracy,  
35 a location from which an unknown position radio signal is transmitted, comprising:

36 means for transmitting a time reference signal;

37 means for receiving said time reference signal at first and second radio receivers;

1 means for resetting first and second counters at said first and second receivers at  
2 predetermined intervals based on said time reference signal, each of said counters containing a  
3 value and receiving a clocking signal;

4 means for correcting a time base at said first and second radio receivers using the received  
5 time reference signal;

6 means for incrementing each of said counters using the respective time base or the  
7 respective radio receiver as a clocking signal;

8 means for receiving an unknown position radio signal at said first and second receivers;

9 means for capturing the respective values of the counters when said unknown position radio  
10 signals are received;

11 means for communicating the captured values to a neural network;

12 means for using the captured values as a timing indicator between the respective time  
13 reference signals and the unknown position radio signal;

14 means for inputting the timing indicator to the neural network; and

15 means for outputting from the neural network a drift corrected timing indicator and based on  
16 the timing indicator and based upon past training of the neural network.

17 88. A system for determining a location inside a building from which an unknown position radio  
18 signal is transmitted, comprising:

19 means for transmitting from plural known indoor locations respective indoor radio signals;

20 means for receiving said indoor radio signals at plural receivers located at different known  
21 locations, said indoor radio signals having at least one of leading edge peak and leading edge  
22 valley delay spread profile cues;

23 means for determining plural reference times of reception when each indoor radio signal  
24 transmitted from said known indoor locations is received by the plural receivers which received each  
25 respective radio signal;

26 means for communicating to a central processing device (CPD) the indoor radio signals  
27 received by the plural receivers and the plural respective times of reception when each of the indoor  
28 radio signals were received by the respective plural receivers; and

29 means for training a network in the CPD using the received indoor radio signals and the  
30 known locations from which each of the received indoor radio signals were transmitted in relation to  
31 the respective plural reference times of reception at the respective plural receivers of the received  
32 indoor radio signals.

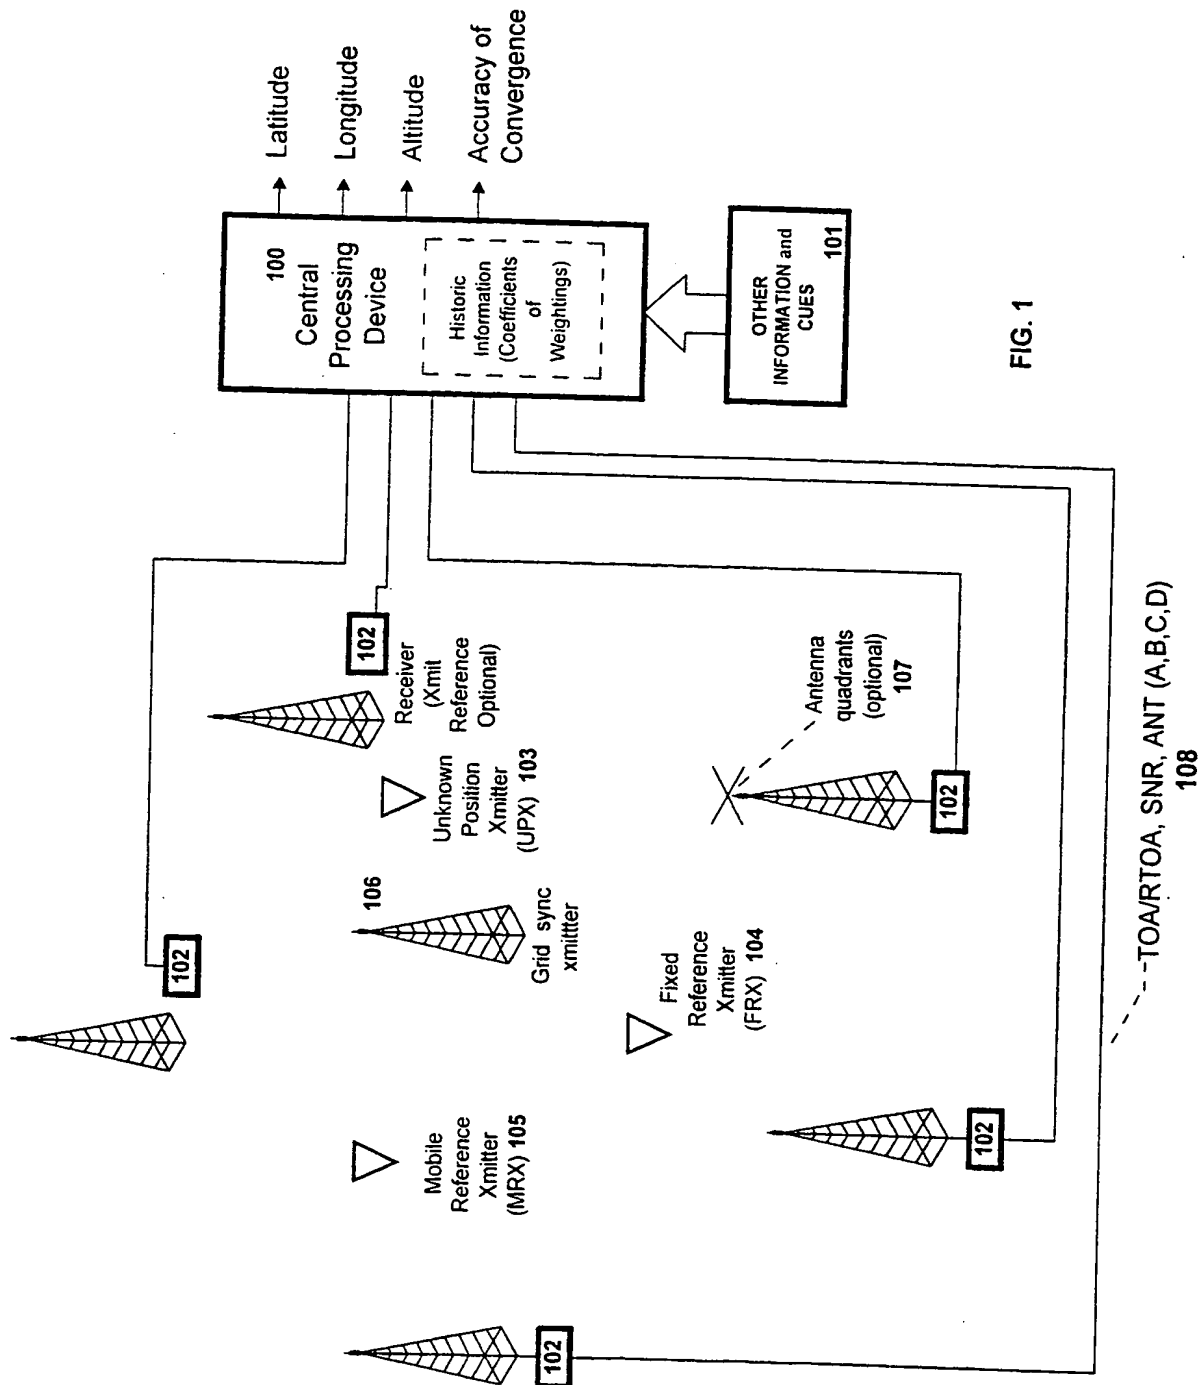
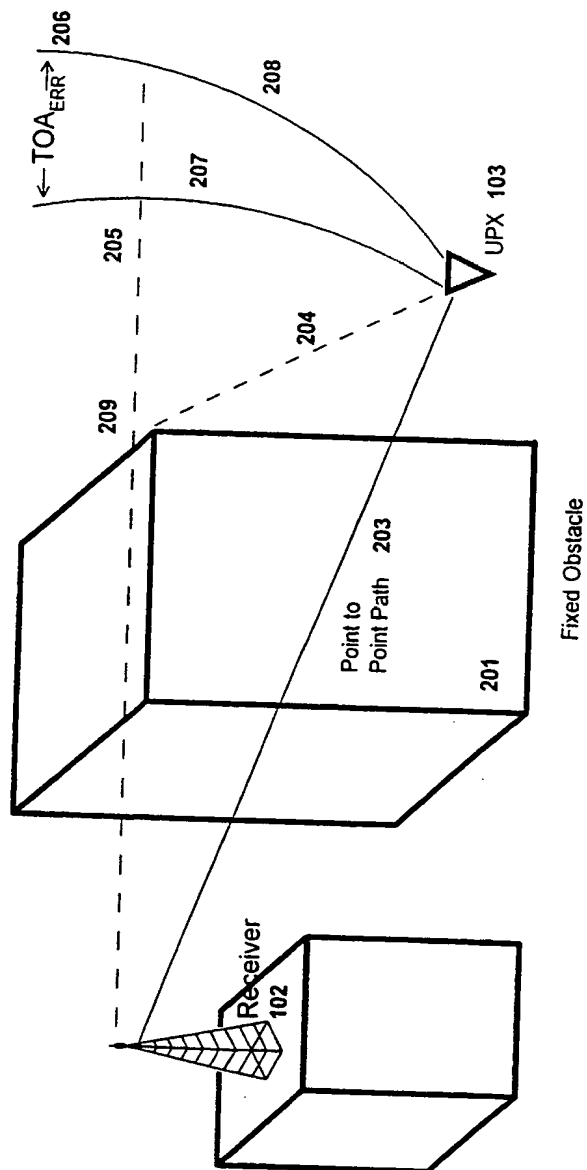
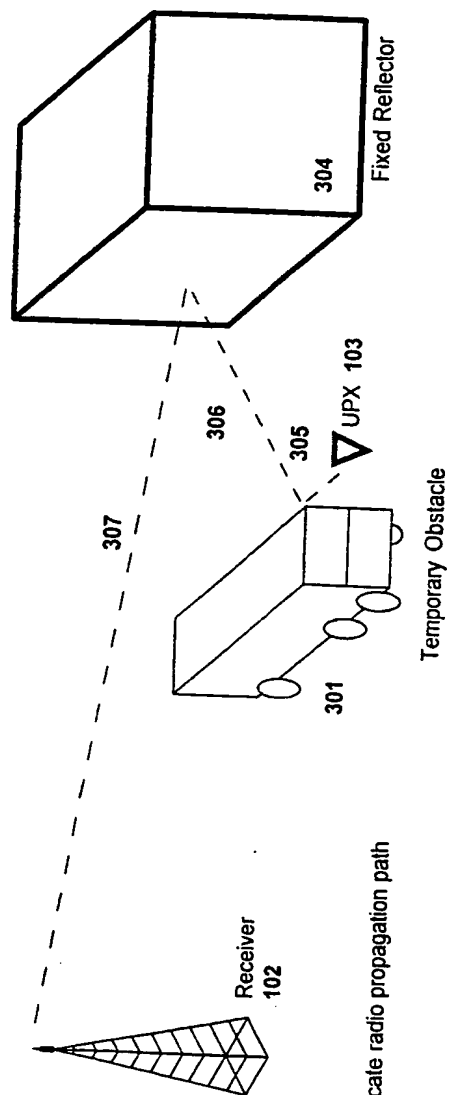


FIG. 1

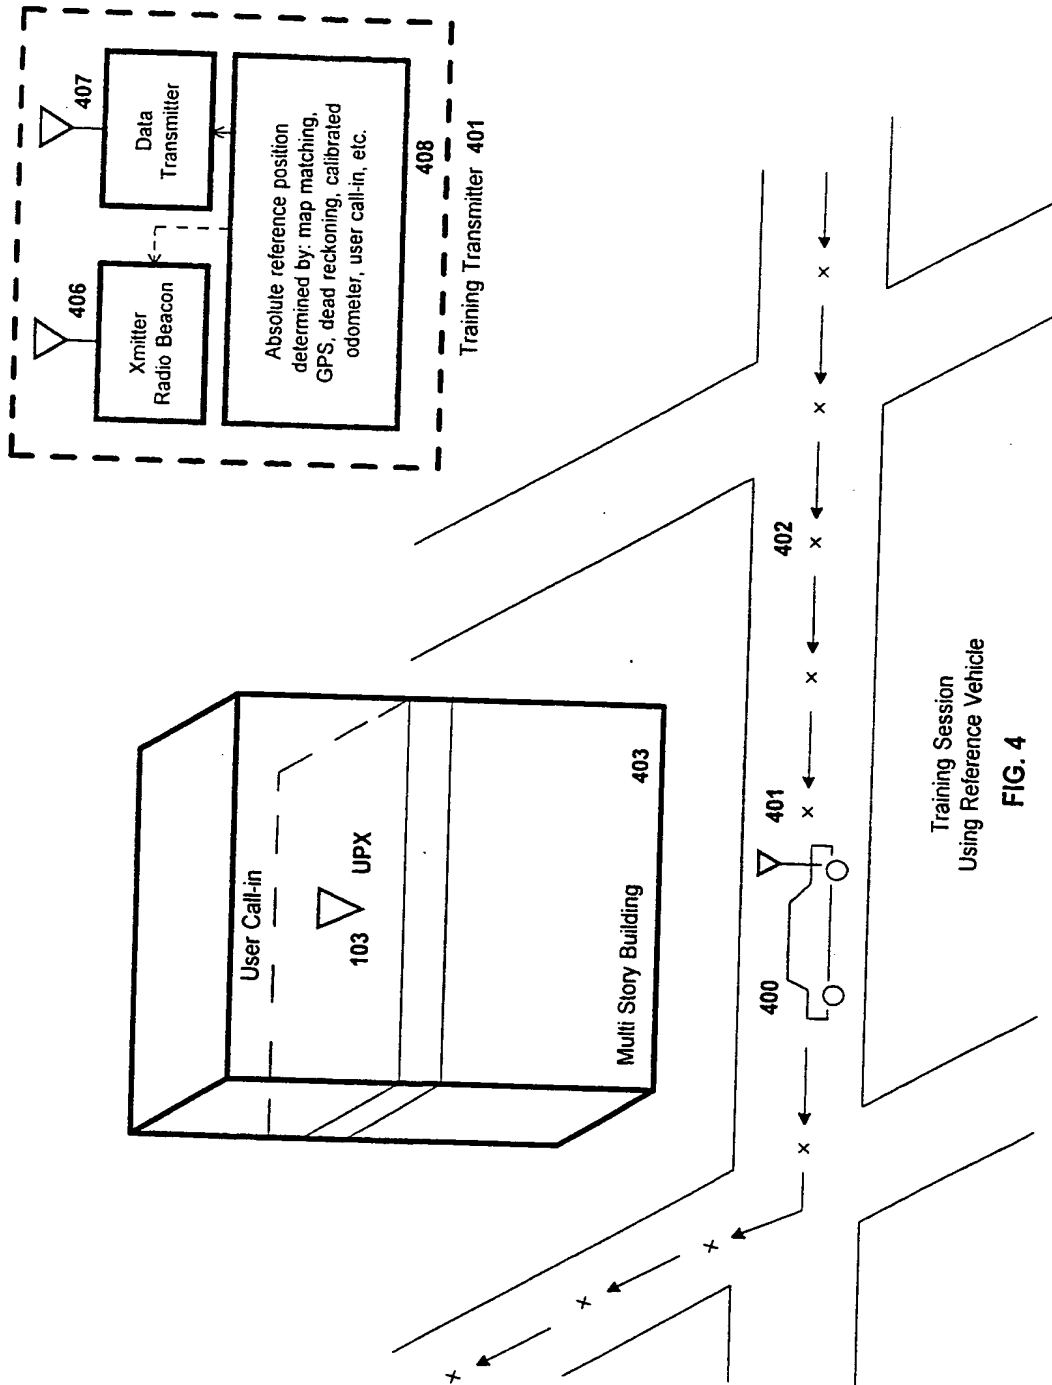



**FIG. 2**



**FIG. 3**

**Note:** Dashed lines indicate radio propagation path



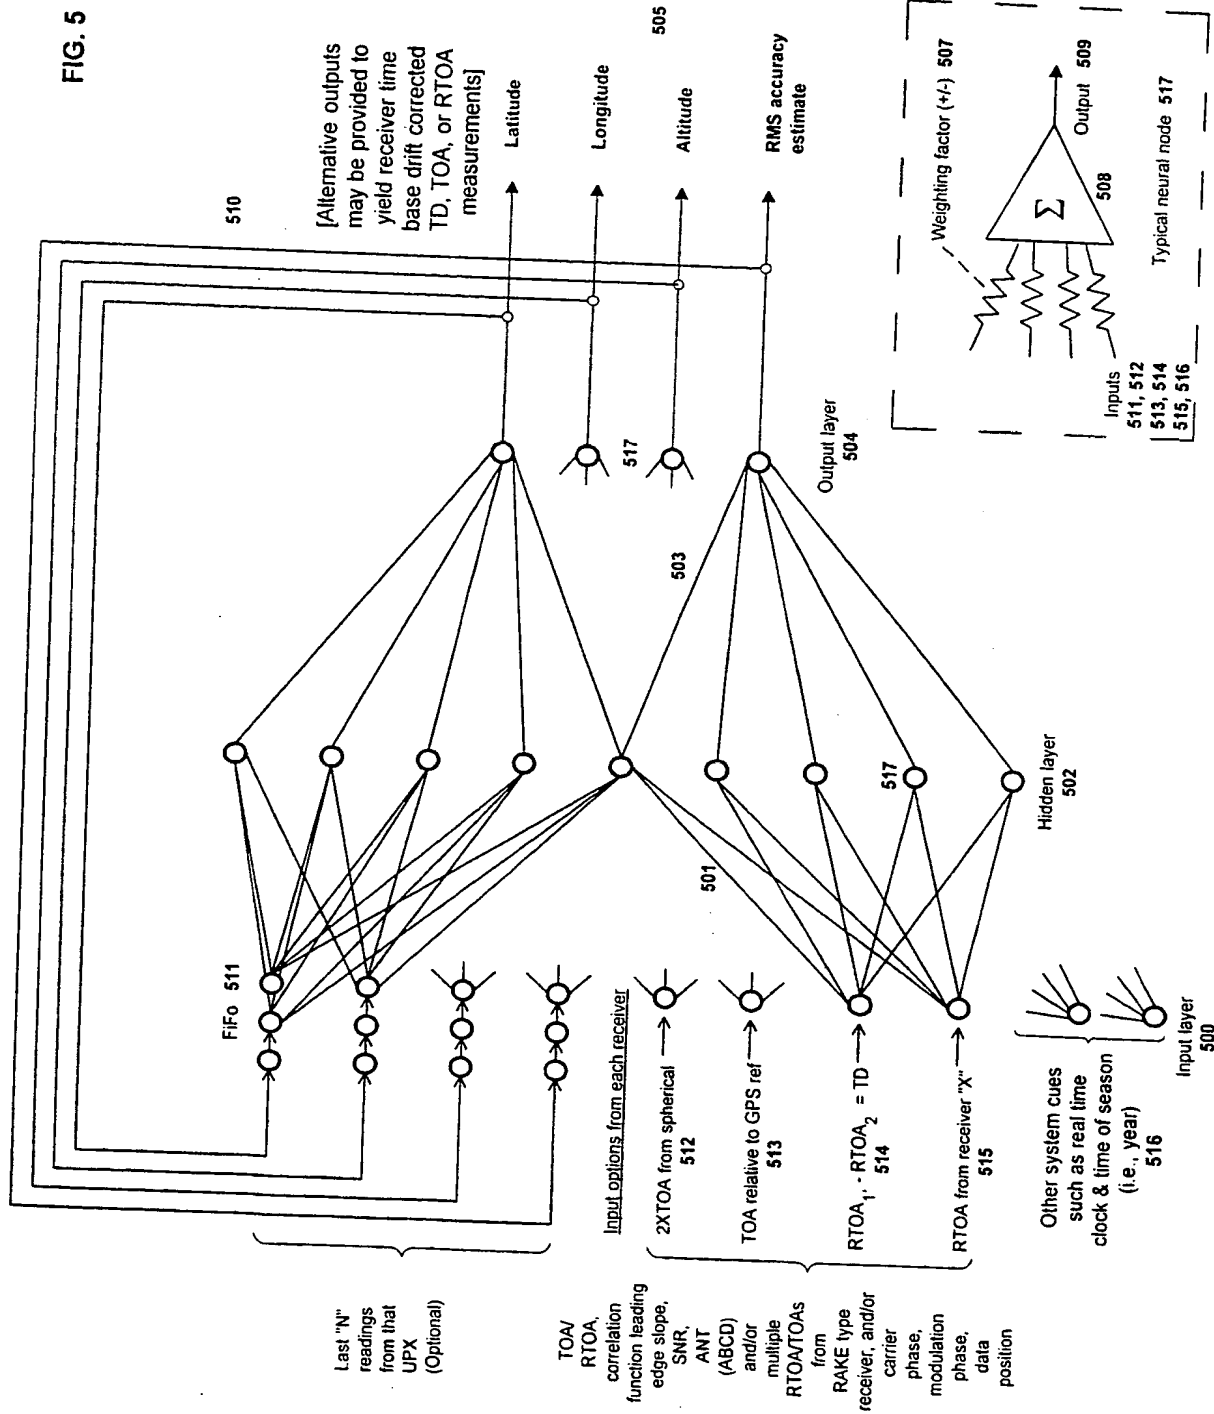



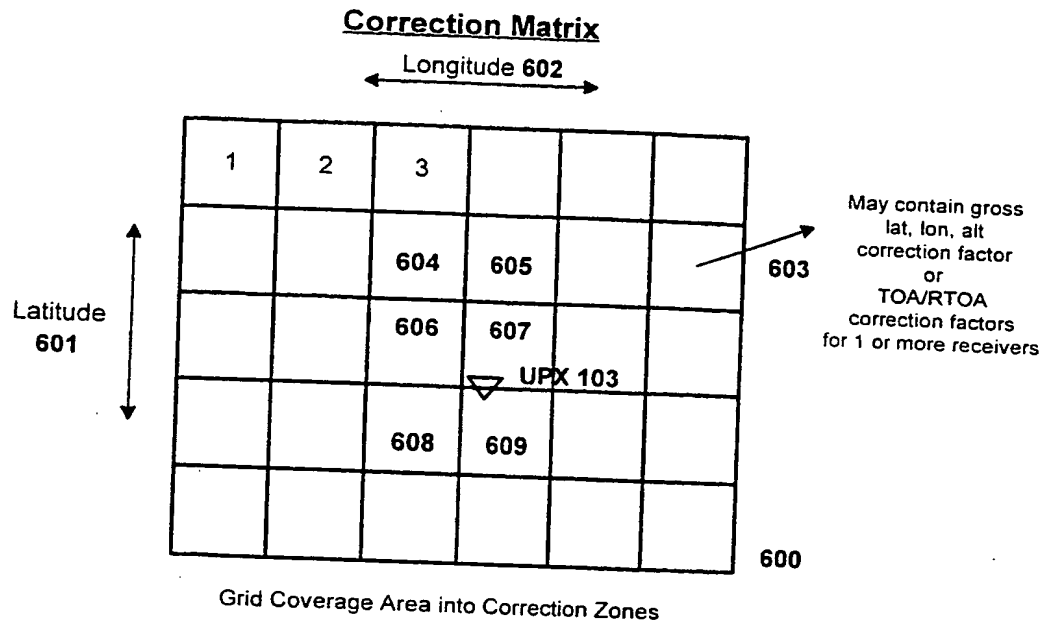


FIG. 6

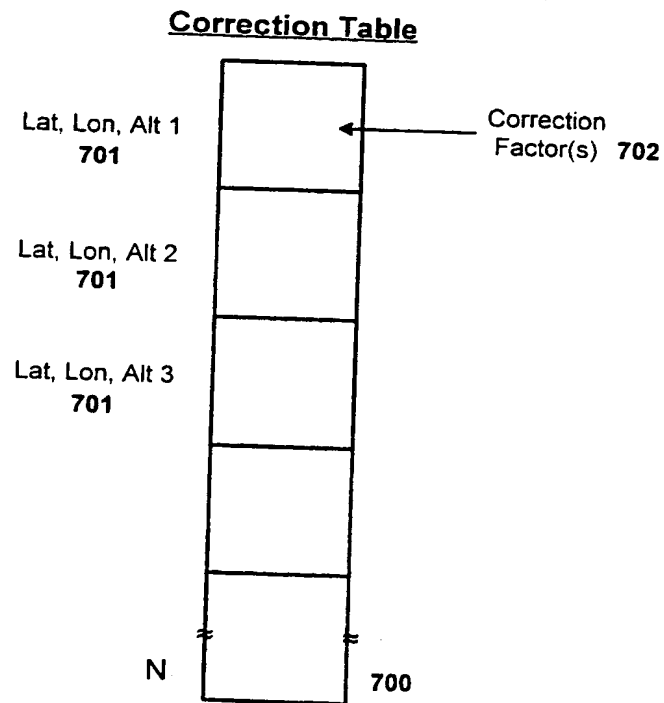


FIG. 7

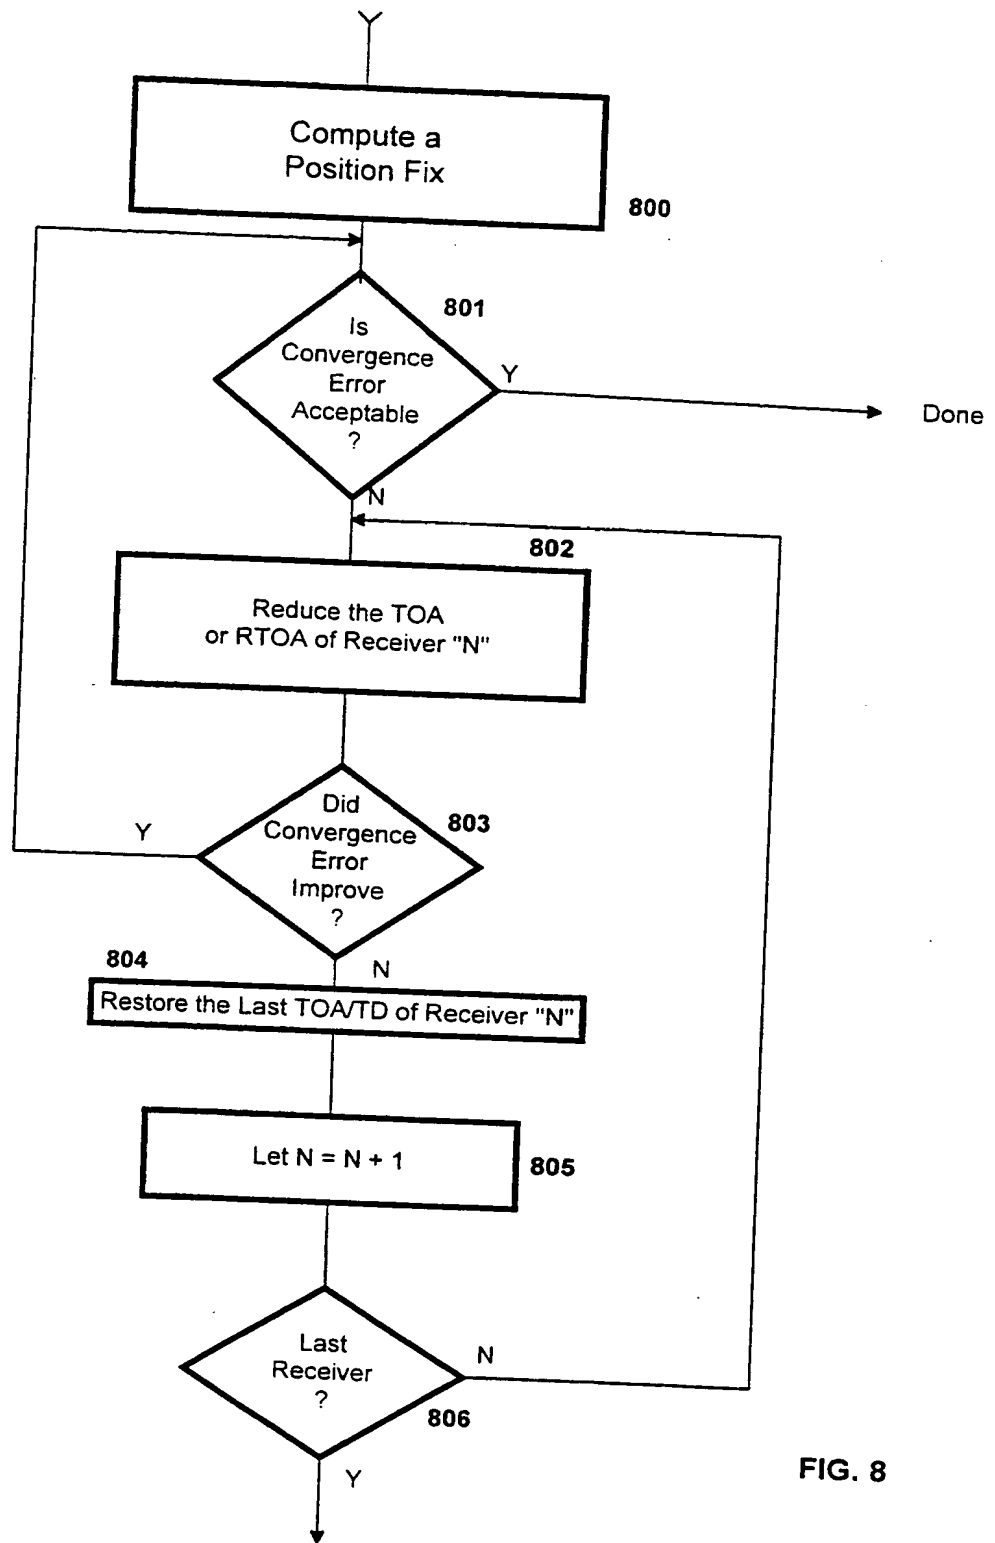
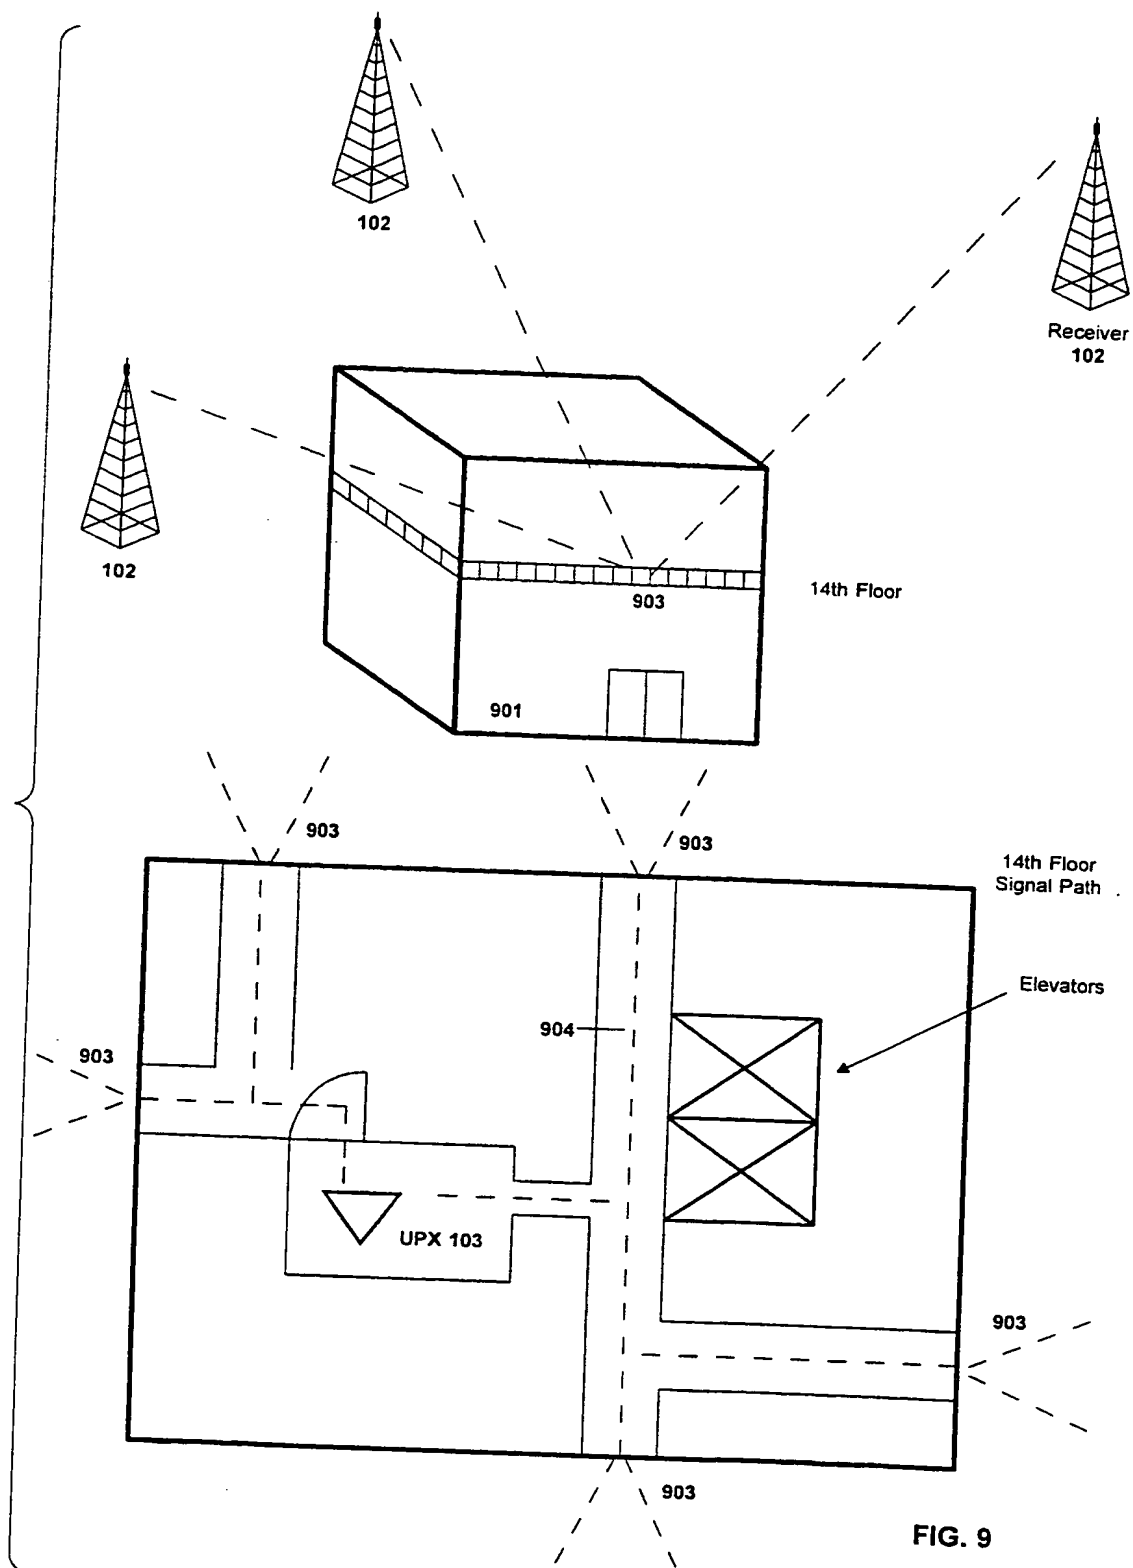


FIG. 8

Convergence error not acceptable  
but some improvement may have been gained



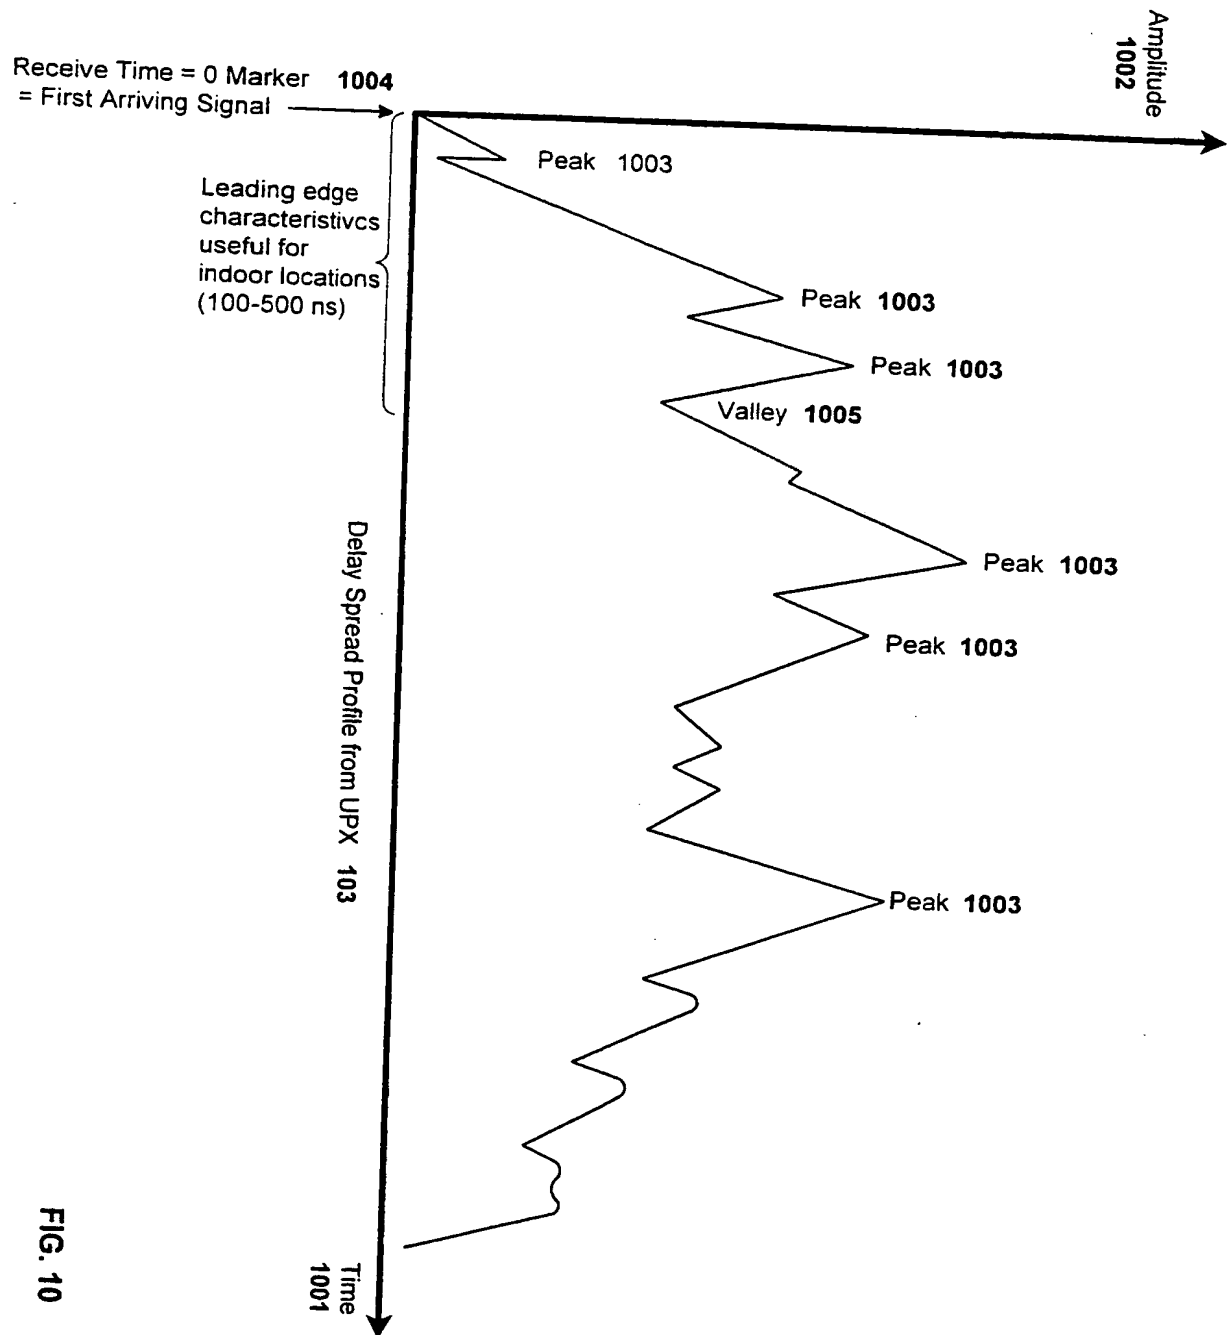


FIG. 10

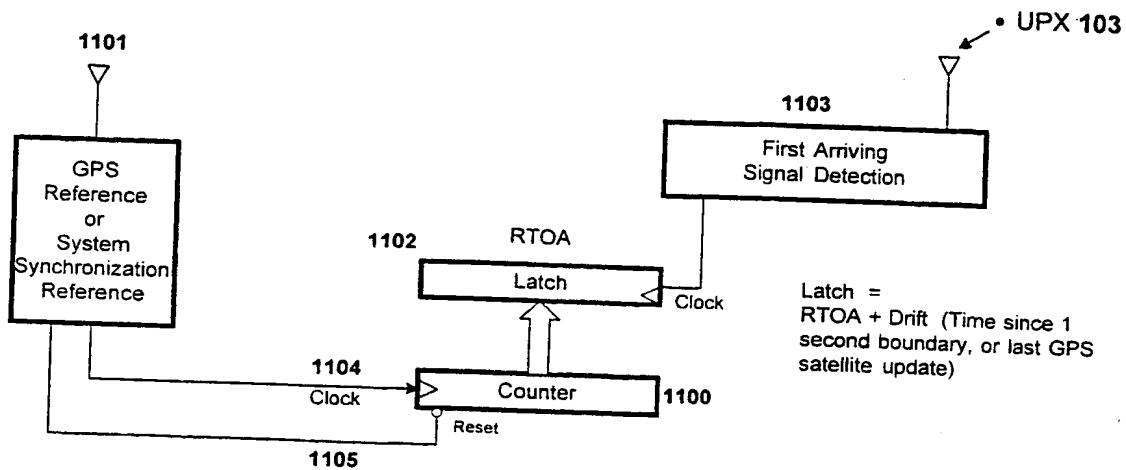


FIG. 11



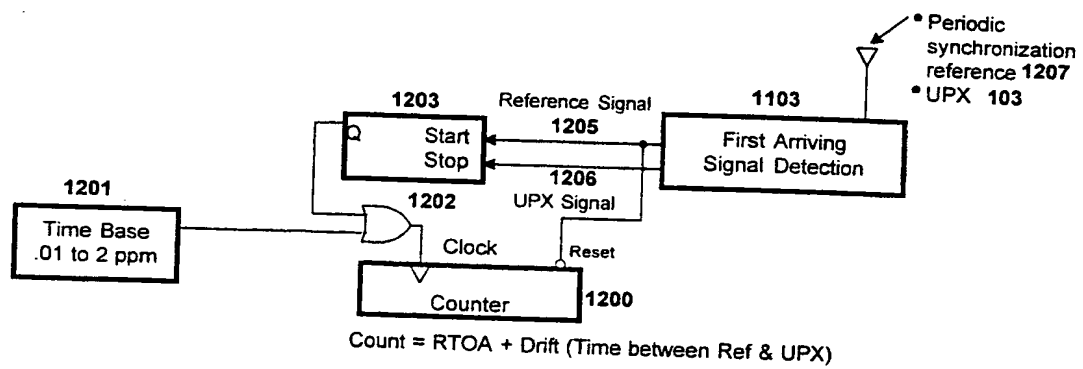


FIG. 12

**FIG. 13**

**Grid Synchronization  
from Fixed Reference Xmitter**

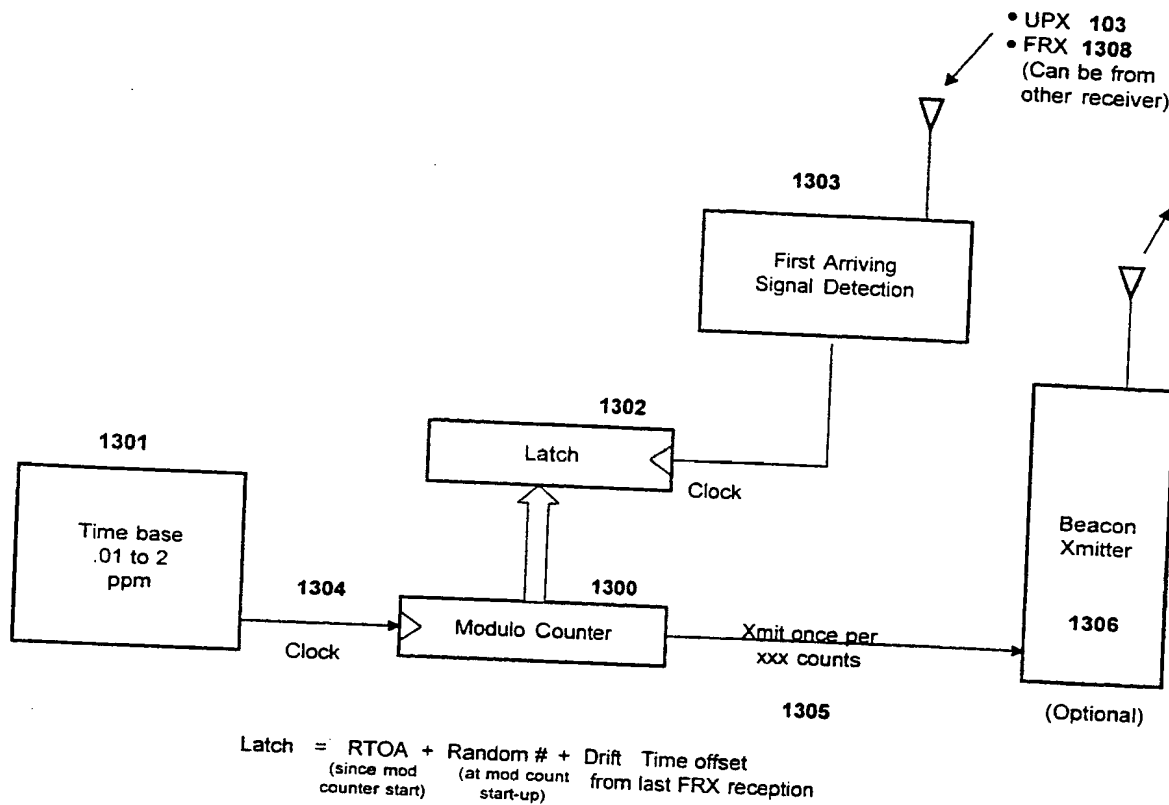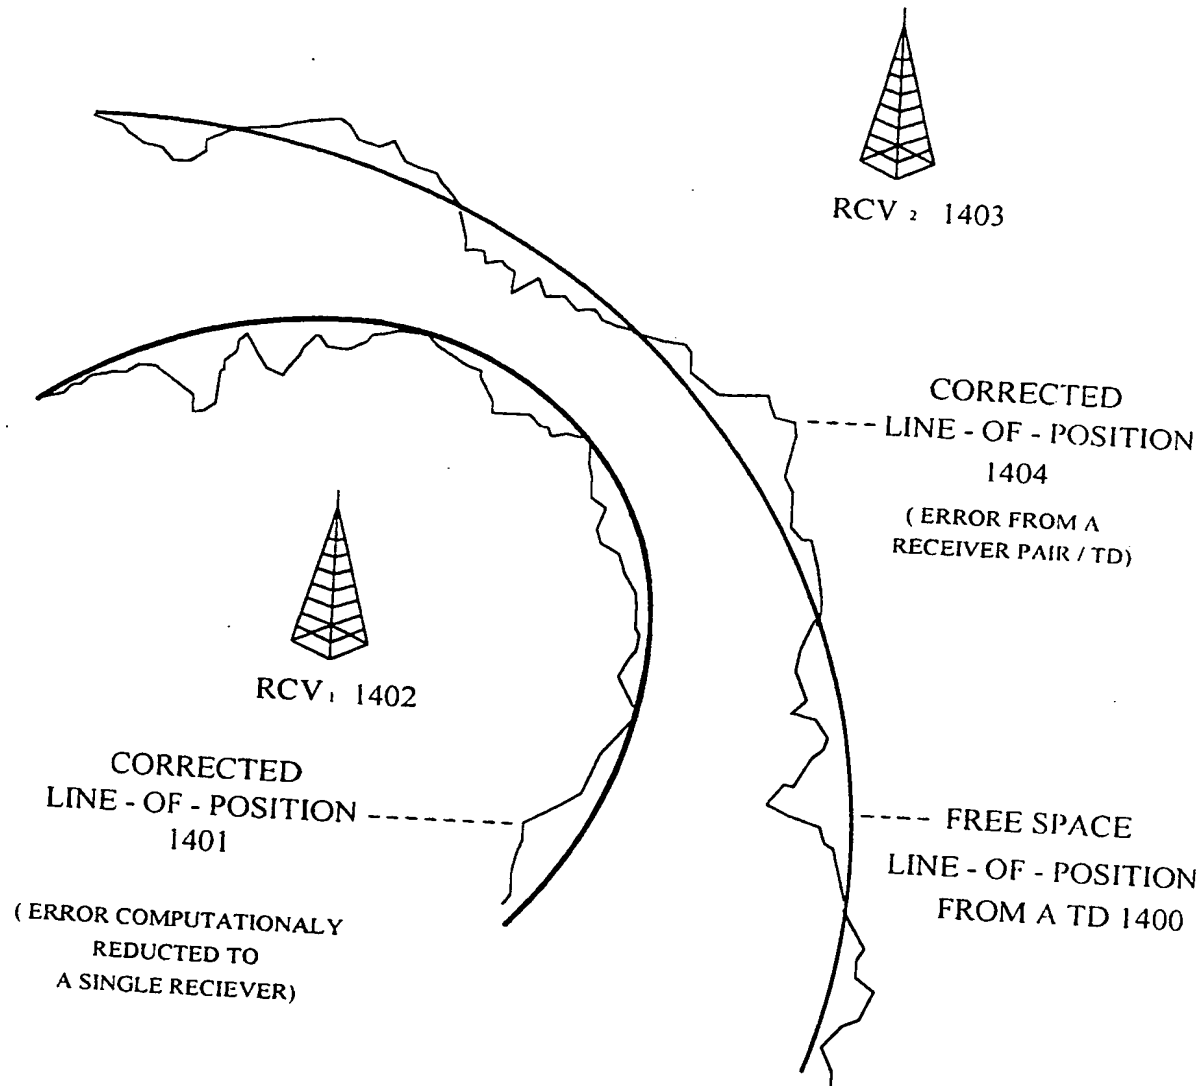

$$RTOA_{RCV1} - RTOA_{RCV2} = TD \text{ (HYPERBOLIC LINE - OF - POSITION)}$$


$$TOA = SPERICAL \text{ LINE - OF - POSSITION}$$

**This Page Blank (uspto)**



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification 6 :</b> <b>H01Q 21/06, 21/24, H04B 7/10</b>		<b>A3</b>	<b>(11) International Publication Number:</b> <b>WO 96/42020</b>
			<b>(43) International Publication Date:</b> 27 December 1996 (27.12.96)
<b>(21) International Application Number:</b> PCT/US96/09012		<b>(81) Designated States:</b> AU, CA, US, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
<b>(22) International Filing Date:</b> 6 June 1996 (06.06.96)			
<b>(30) Priority Data:</b> 08/487,522 7 June 1995 (07.06.95) US		<b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	
<b>(71) Applicant (for all designated States except US):</b> SANCONIX, INC. (DEL CORP.) [US/US]; Suite 202, 101 W. Robert E. Lee Boulevard, New Orleans, LA 70124 (US).		<b>(88) Date of publication of the international search report:</b> 6 February 1997 (06.02.97)	
<b>(72) Inventors; and</b> <b>(75) Inventors/Applicants (for US only):</b> SANDERFORD, Hugh, Britton, Jr. [US/US]; 7331 General Haig, New Orleans, LA 70124 (US). POPPE, Martin, C. [US/US]; 233 Van Patten Parkway, Burlington, VT 05401-1135 (US).			
<b>(74) Agent:</b> REGARD, Joseph, T.; Joseph T. Regard, Ltd. (plc), Suite 100, 3200 Ridgelake Avenue, Metairie, LA 70002 (US).			

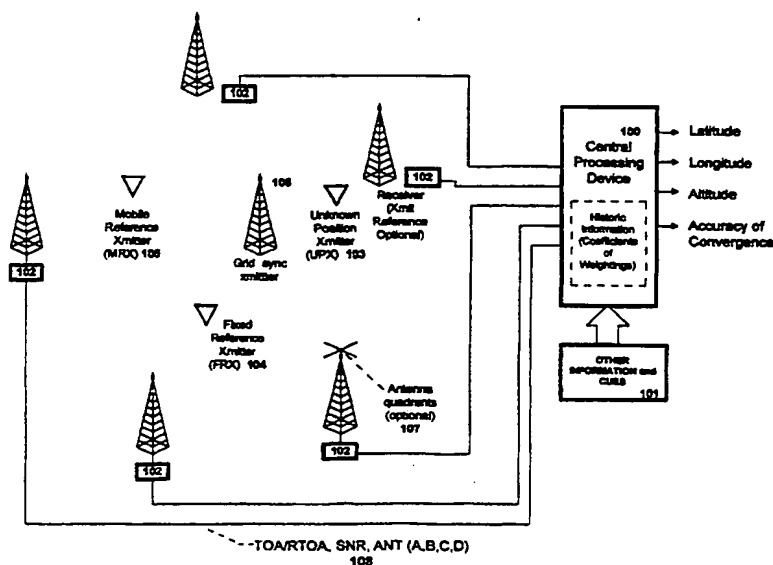**(54) Title:** ENHANCED POSITION CALCULATION**(57) Abstract**

A system for enhancing the accuracy of a radio position fix, utilizing computational techniques including neural networks (100), mapped grid coefficients as input to a set of simultaneous or differential equations, and table lookup of correction coefficients for known low accuracy positions. Receiver array (102) synchronization, such that all system elements in a particular coverage area will obtain a time reference appropriate for time of flight radio location measurements, is disclosed. Techniques to enhance the accuracy of position fix references, which are located in a coverage area, as well as a mobile reference carried by a search team are disclosed. A system for guiding a search team to an unknown positioned transmitter (103) that is located within a structure is taught using the present techniques, as well as training a central computing unit (100) by using actuarial data, so that multi-path errors resulting from fixed or mobile obstacles may be reduced.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Larvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

# INTERNATIONAL SEARCH REPORT

International application No.  
PC 96/09012

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : H01Q 21/06, 21/24; H04B 7/10

US CL : 342/363, 365, 386, 420, 451

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 342/363, 365, 386, 420, 451

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP, A, 0613453 (OLSSON) 28 DECEMBER 1994, SEE FIGURES 1-4	1-31, 39-51, 81-84, 88
X	SE, A, 470,151 (KALLMAN) 15 NOVEMBER 1993, SEE CLAIMS 1 AND 3.	1-31, 39-51, 81-84, 88
A,P	US, A, 5,515,062 (MAINE ET AL) 07 MAY 1996, SEE FIGURES 5 AND 7	1-88
.	.	
.	.	
.	.	
.	.	

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

27 NOVEMBER 1996

Date of mailing of the international search report

31 DEC 1996

Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

THEODORE BLUM

Telephone No. (703) 305-1833

Form PCT/ISA/210 (second sheet)(July 1992)\*

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/US96/09012

## Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This international report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:  
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

Please See Extra Sheet.

1. ☒ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

☐

The additional search fees were accompanied by the applicant's protest.

☐

No protest accompanied the payment of additional search fees.

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/JP96/09012

## BOX II. OBSERVATIONS WHERE UNITY OF INVENTION WAS LACKING

This ISA found multiple inventions as follows:

Group I. Claims 32-38, 52, 53, and 85, drawn to determining a location of an unknown position radio transmitter including receiving, with a signal enhancing mode, radio signals from said unknown position radio transmitter, classified in class 342, subclass 386.

Group II. Claims 1-31, 39-51, 81-84, and 88, drawn to determining a location from which an unknown position radio signal is transmitted including training a network, classified in class 342, subclass 451.

Group III. Claims 54-80, 86, and 87, drawn to correcting a receiver's time base clock drift via a time reference signal transmission and a central processing device to, with increased accuracy, locate where an unknown position radio signal is transmitted, classified in class 342, subclass 420.

Inventions of Groups I, II, and III, are related as subcombinations disclosed as usable together in a single combination. The subcombinations are distinct from each other if they are shown to be separately usable. In the instant case, invention to correcting a receiver's time base, for example, has separate utility such as correcting the time base of a transceiver.

Because these inventions are distinct for the reasons given above and have acquired a separate status in the art as shown by their different classification, and have acquired a separate status in the art because of their recognized divergent subject matter, restriction for examination purposes as indicated is proper.

This Page Blank (uspto)